


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW

Scale 2:1; looking down (along -Z)

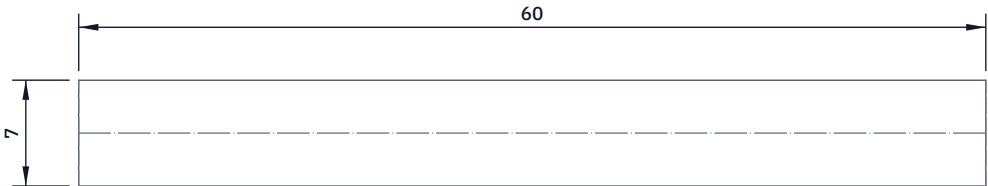


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

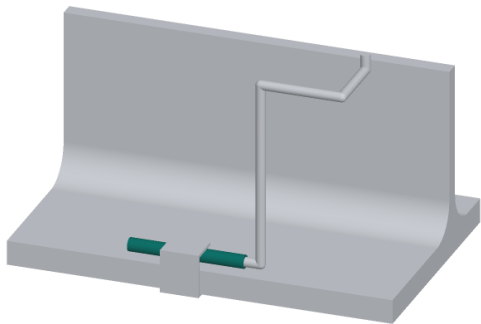

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two, both the same. Solder the sensor carrier to a 3-core sealed outdoor lead (1-Wire: data, ground and supply), 2 m for the steel probe and 3 m for the air probe.

Push the carrier to the closed end of the sheath, sensor face down, with a dab of thermal paste between the sensor and the sheath end.

Fill the sheath with potting epoxy from the closed end up, with no air pockets; fit heat-shrink with adhesive over the sheath mouth.

Steel probe: lies on the bottom flange top, 6.5 from the tip, held by a spring-steel flange clip with thermal paste under it.

Air probe: hangs on its lead between the girders, in shade.

Check each probe in ice water: 0 degC within 0.5 degC (R5).

BRIDGEPULSE

github.com/BoujeeEnjinia1701/bridgepulse

BridgePulse temperature probe (make 2): making sketch

DRAWING NO. BRP-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Stainless sheath 7 x 60 mm, TMP1826 class sensor on a carrier, potting epoxy					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	