


CONCEPT, NOT FOR FABRICATION


BridgePulse · github.com/BoujeeEnjinia1701/bridgepulse

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-10-01	AC

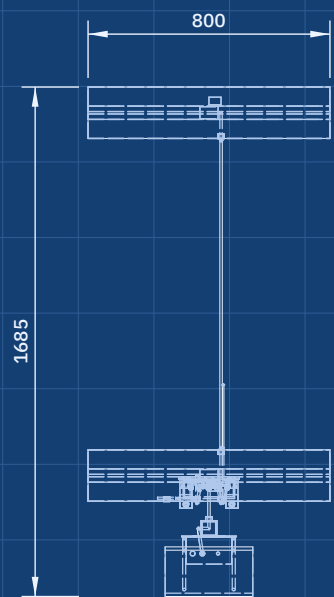


TOP VIEW

Scale 1:25; looking down (along -Z)

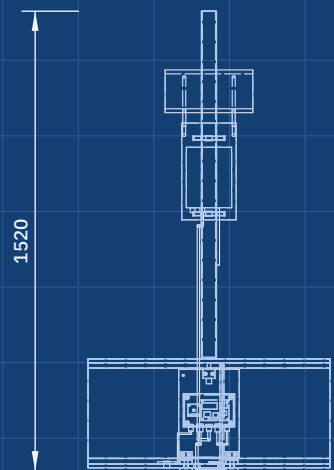


FRONT VIEW

Scale 1:25; looking at the front (along +Y)

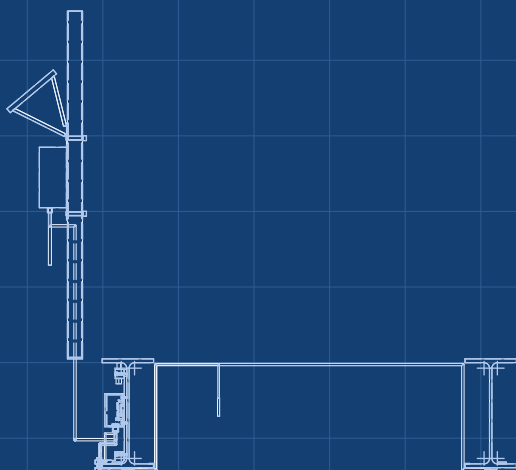

RIGHT VIEW

Scale 1:25; looking at the right side (along -X)

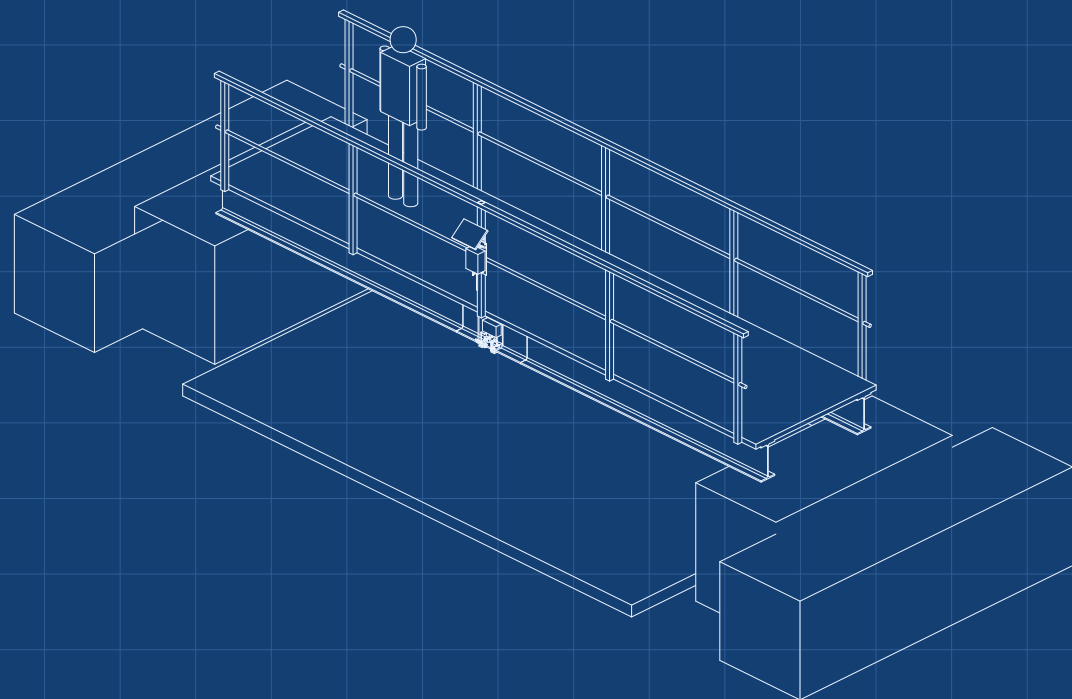

ISOMETRIC VIEW

Not to scale; grey is for scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

3-axis MEMS accelerometer (22.5 $\mu\text{g}/\text{VHz}$), 2 strain half-bridges, 2 temperatures
10 min record each hour at 250 Hz; 16.9 mW average at the port (BRP-CAL-001)
Example 7 m span: first mode 23.9 Hz; walkers gated out, 0.015 % scatter (sim.)
Hub between the flanges; 10 mm below the soffit at most; no drilling
\$248 BridgePulse-specific parts; \$374 with the FieldNode core

BRIDGEPULSE

github.com/BoujeeEnjinia1701/bridgepulse

Footbridge monitor concept

DRAWING NO. BRP-DWG-010		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:25	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand