



CONCEPT, NOT FOR FABRICATION


| REV | DESCRIPTION   | DATE       | BY |
|-----|---------------|------------|----|
| P1  | Concept sheet | 2026-09-25 | AC |

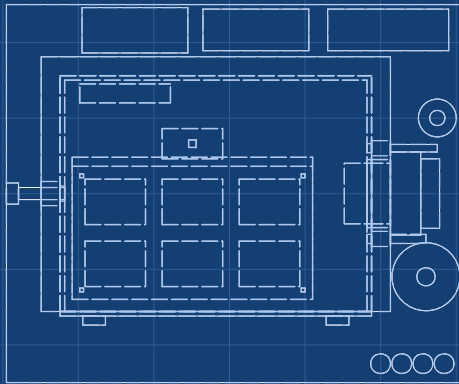


TOP VIEW  
Scale 1:10

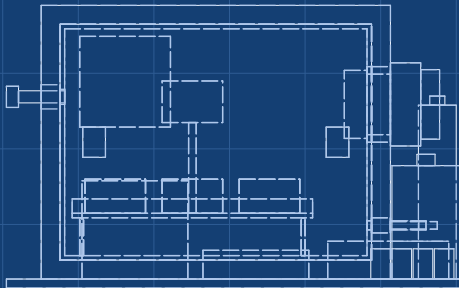

FRONT VIEW  
Scale 1:10

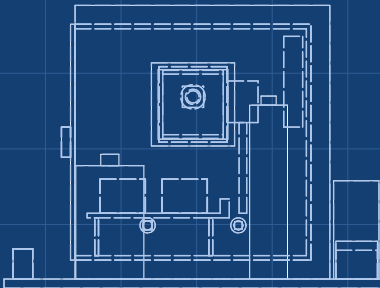

RIGHT VIEW  
Scale 1:10

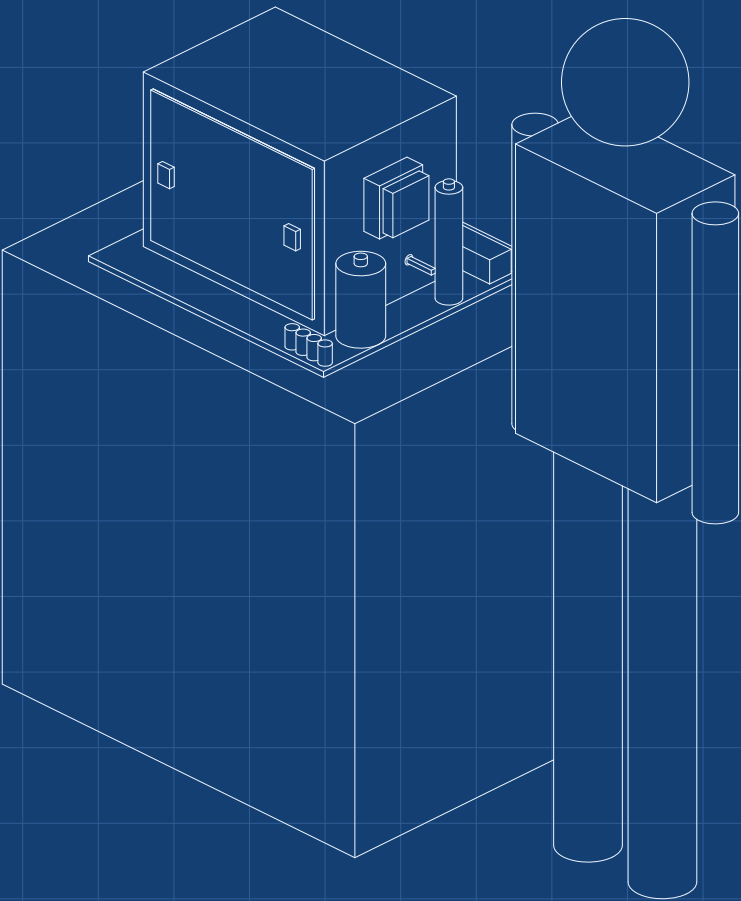

ISOMETRIC VIEW  
Not to scale; grey is for scale

KEY FIGURES

Chamber 400 x 300 x 300 mm inside (36 L), 6 sensor bays  
10 to 40 °C in rooms to 25 °C; 13 °C lowest in a 30 °C room  
20 to 85 % RH (85 % at 20 °C only in rooms below 19 °C)  
PM2.5 decay 300 to 5 µg/m³ in about 28 min  
References: 2 x SHT45, SCD30, collocated SPS30  
600 x 500 x 374 mm, 12 V, 89 W peak, 13.4 kg  
About \$404 in parts; budget \$300 (CLR-CAL-001)

CALRIG

Sensor calibration chamber concept

|                            |             |                                                                                                     |                    |                       |                |
|----------------------------|-------------|-----------------------------------------------------------------------------------------------------|--------------------|-----------------------|----------------|
| DRAWING NO.<br>CLR-DWG-010 |             |                                                                                                     | REV<br>P1          | SHEET<br>1 of 1       | SIZE<br>ANSI B |
| SCALE<br>1:10              | UNITS<br>mm | PROJECTION<br> | DATE<br>2026-09-25 | DRAWN<br>Amish Chadha |                |

MATERIAL / NOTES  
Massing model for concept communication