



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

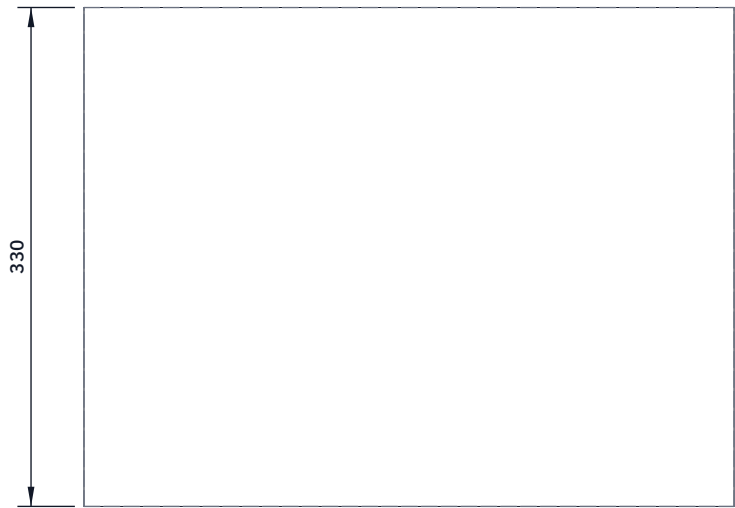

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

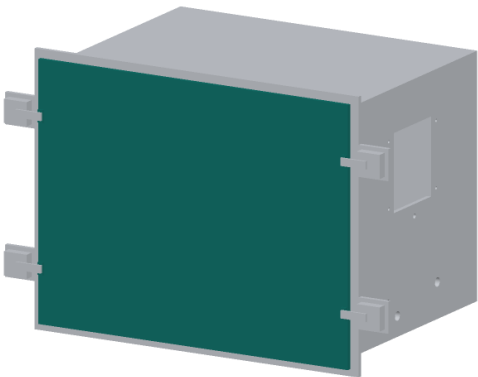

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 430 x 330 from 6 mm clear cast acrylic; flame or sand the edges smooth and leave the film on until fitted.

Four latch keepers on the front face: centred 95 above and 95 below the door's centre line, 1 mm in from each side edge.

Mark the keeper holes through the keeper; drill 3 mm, M3 screws with nuts, a nylon washer under each.

Fit: the door's back face presses on the gasket on the front frame; it overlaps the 400 x 300 opening by 15 all round.

Four draw latches on the frame tabs pull it on.

Check: with the latches closed the gasket is squeezed evenly; a strip of paper is held tight all round.

CALRIG			github.com/BoujeeEnjinia1701/calrig		
CalRig door: making sketch					
DRAWING NO. CLR-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Clear cast acrylic sheet 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		