


CONCEPT, NOT FOR FABRICATION


CalRig · github.com/BoujeeEnjinia1701/calrig

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-09-30	AC

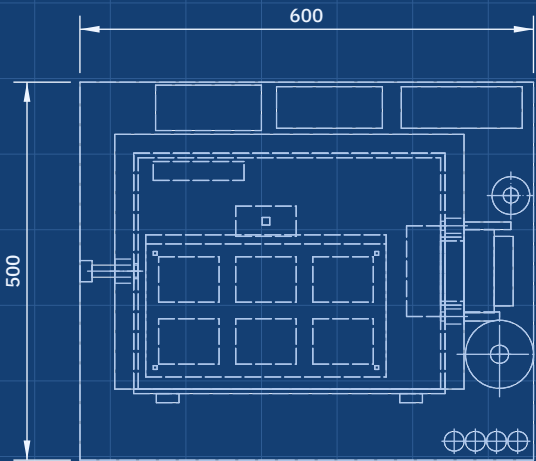


TOP VIEW

Scale 1:10; looking down (along -Z)

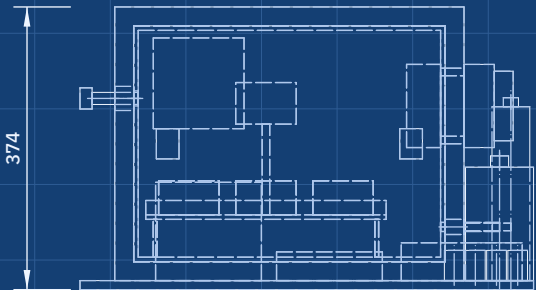


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

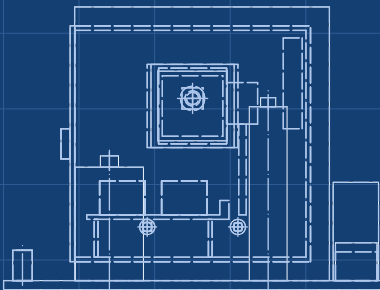

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

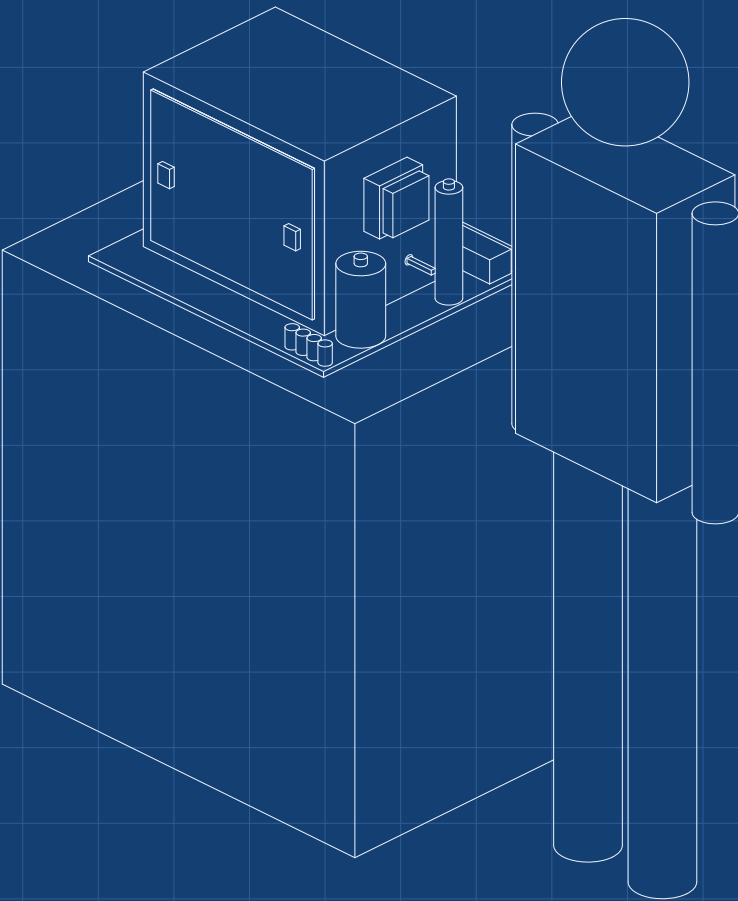

ISOMETRIC VIEW

Not to scale; grey is for scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

Chamber 400 x 300 x 300 mm inside (36 L), 6 sensor bays
10 to 40 °C in rooms to 25 °C; 11 °C lowest in a 30 °C room
20 to 85 % RH; 85 % at 20 °C in rooms up to 28 °C
PM2.5 decay 300 to 5 µg/m³ in about 28 min
References: 2 x SHT45, SCD30, collocated SPS30
600 x 500 x 374 mm, 12 V, 90 W peak, 13.6 kg
About \$412 in parts; budget \$412 (CLR-CAL-001)

CALRIG

github.com/BoujeeEnjinia1701/calrig

Sensor calibration chamber concept

DRAWING NO. CLR-DWG-010		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	