


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

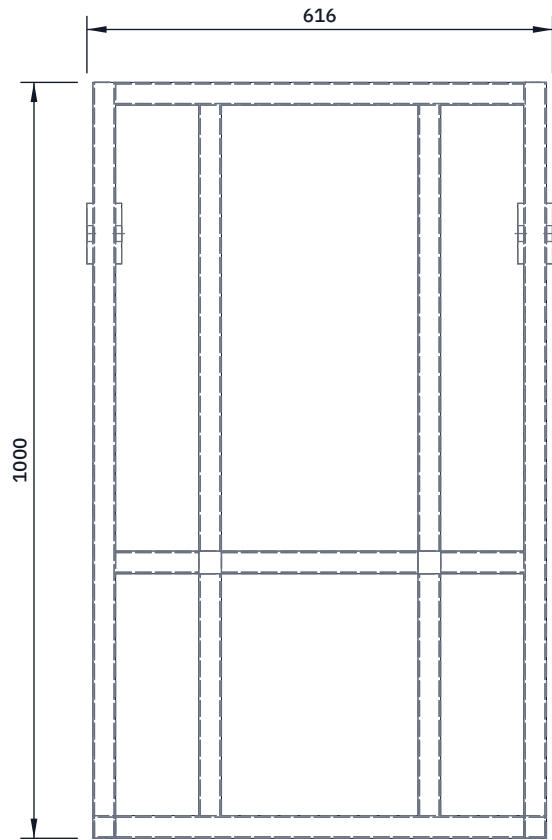


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

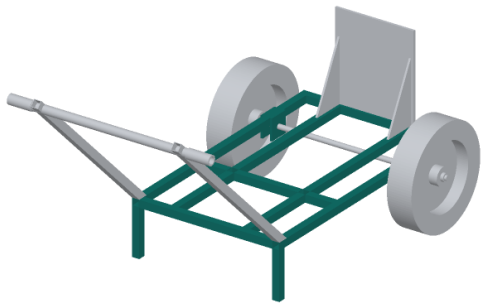

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Side rails: two tubes 1,000 long, 540 apart inside (600 outside).
Cross members, 540 long, between the rails: front, flush with the rail front ends; rear, its back face 30 in from the rail back ends; middle, 350 behind the front one, cut in three (110, 260, 110) round the bearers.
Bearers: two lines of tube 260 apart inside, 320 long in front of the middle cross member and 590 behind it, all tops flush.
Legs: 190 long under each rail's front end; a 40 mm rubber foot below.
Axle plates: four, 80 x 85 x 8 mm, a 21 mm hole 40 up from the bottom; one each side of each rail, centred 800 behind the rail front ends, tops flush with the rail top. Drill the four as a stack, then weld with a 20 mm bar through all four holes so they line up.
Weld all round on a flat table; check the diagonals before welding.
Check: diagonals equal within 3 mm; the 20 mm bar turns by hand.

CAMPBREAK

github.com/BoujeeEnjinia1701/campbreak

CampBreak cart base frame: making sketch

DRAWING NO. CBK-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 30 x 30 x 2 mm square tube and 8 mm plate, S235; MIG welded					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand