



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW
Scale 1:2; looking down (along -Z)



FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

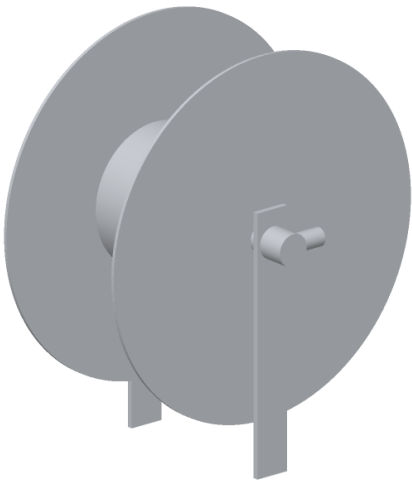

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Spindle: 25 mm bright steel bar, 290 long, ends chamfered 1 mm.
Spacers: two 40 x 26 mm tube pieces, 12 long; one each side of the drum, between the drum flange boss and the upright.
Collar: a 25 mm collar with a set screw against the outside of the left upright; the swivel inlet holds the right-hand end.
Fit: the spindle passes through the left upright, a spacer, the drum, the other spacer and the right upright into the swivel.
Check: the drum turns by hand with 1 to 2 mm of side float.

CAMPBREAK			github.com/BoujeeEnjinia1701/campbreak		
CampBreak reel spindle and spacers: making sketch					
DRAWING NO. CBK-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 25 mm bright steel bar; 40 x 26 mm tube; bought collar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		