



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

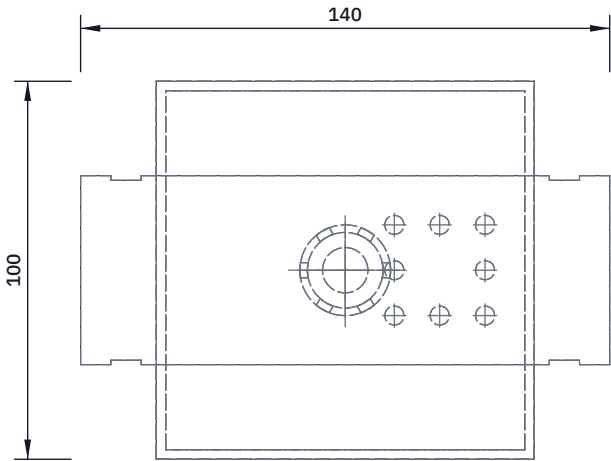


TOP VIEW

Scale 1:2; looking down (along -Z)

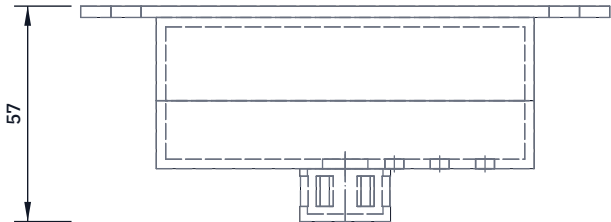


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

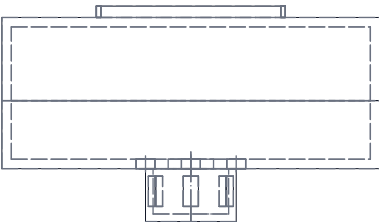

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

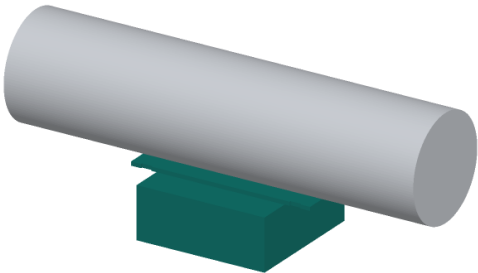

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Plate: 140 x 50 x 3 mm aluminium. Four slots 8 x 3 mm, 58 each side of the middle, 24 to 27 from the long centre line, for the ties.

Two 4.5 mm holes 30 each side of the middle for M4 screws.

Box base (22 deep): two 3.3 mm holes to match the plate; screw the plate on from inside with two M4 screws.

Box cover (18 deep): a 12 mm hole in the middle for the thermistor; eight 5 mm sound holes round a point 25 from the middle.

Guard: printed PETG cup 24 across, 14 tall, six side slots; glued over the 12 mm hole so the bead sits in moving air.

Fit: plate flat under a roof pole, held by two UV-stable ties.

Check: the cover closes on its seal with the board inside.

CAMPBREAK

github.com/BoujeeEnjinia1701/campbreak

CampBreak heat alarm mounting plate, box and sensor guard: making sketch

DRAWING NO. CBK-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 3 mm aluminium plate; stock ABS box 100 x 100 x 40; printed PETG guard					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand