



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	180 mm rotors, metallic pads (CGM-DDR-002)	2026-09-25	AC

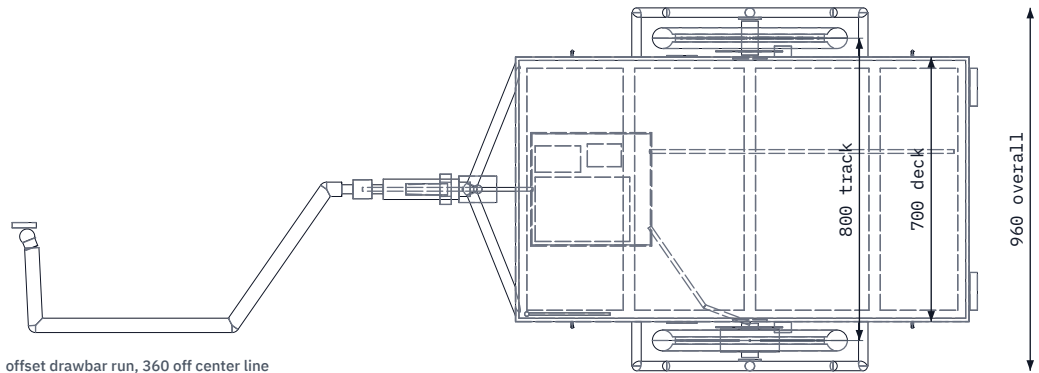


TOP VIEW
Scale 1:20

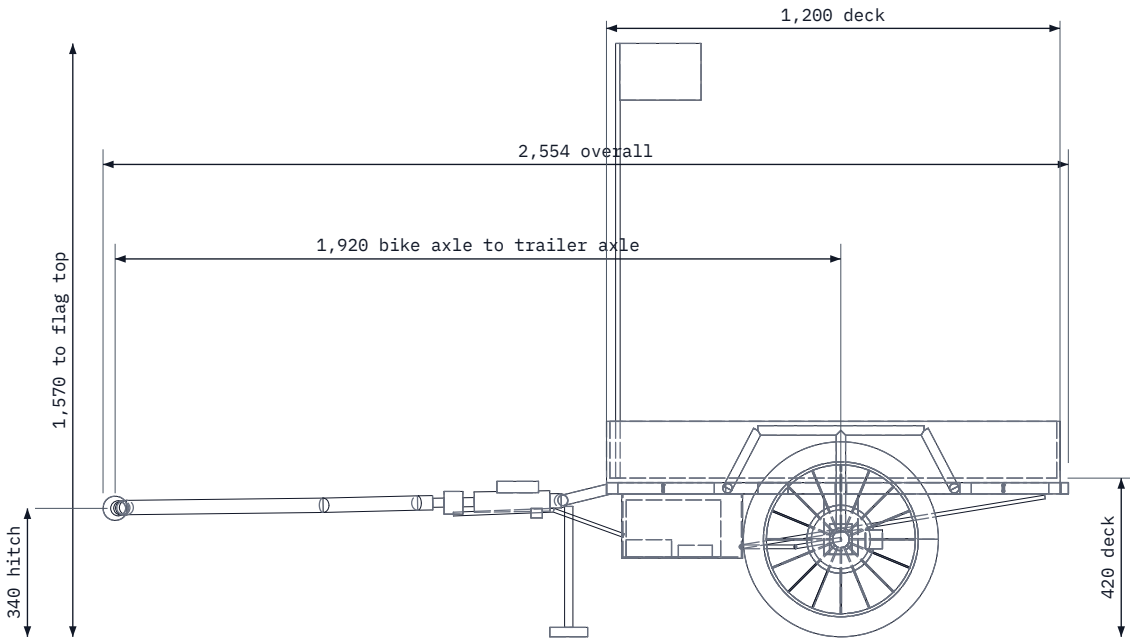

FRONT VIEW
Scale 1:20

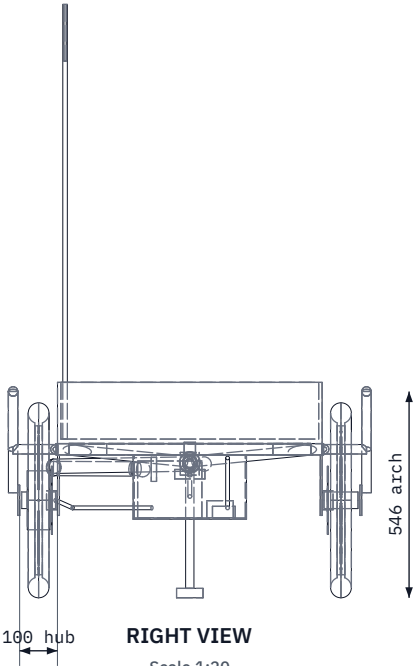

RIGHT VIEW
Scale 1:20

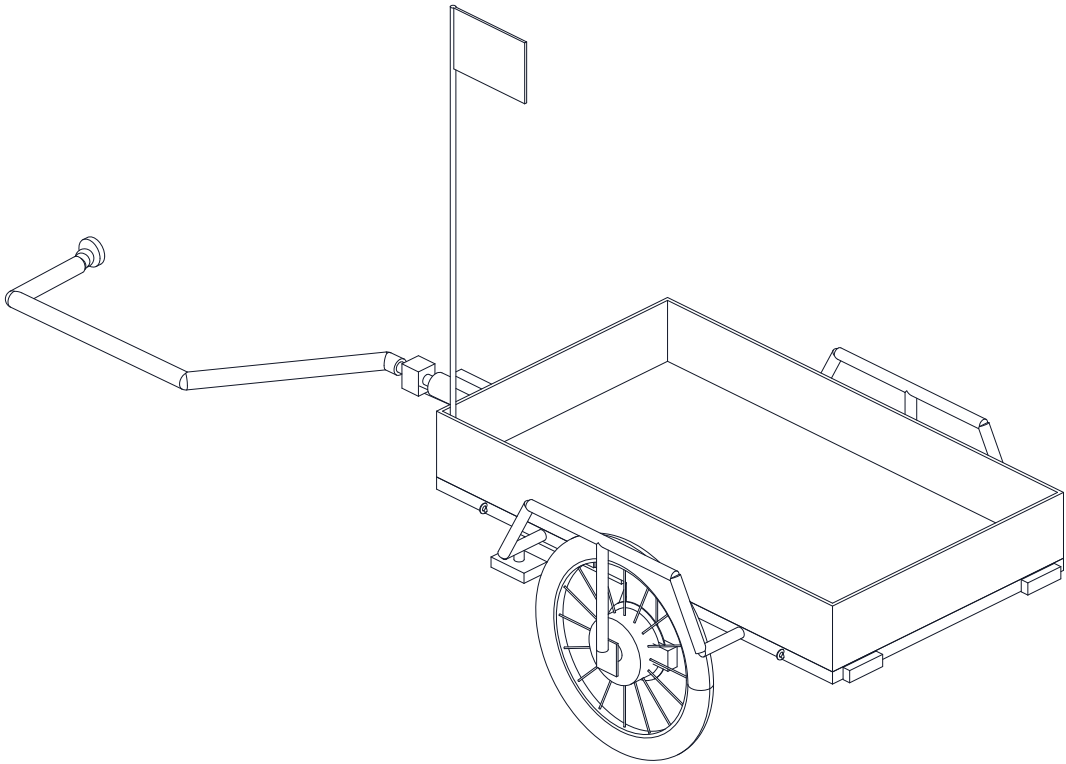

ISOMETRIC VIEW
Not to scale

MAIN DIMENSIONS AND INTERFACES (MM)

Wheels 20 in (ETRT0 406), 100 mm hubs; dropout faces 350 and 450 off center
Disc brakes both wheels, 180 rotors, metallic pads
Deck 1200 x 700 x 12 plywood at Z 420; axle 20 behind deck center
Frame 30 x 30 x 1.5 box; drawbar 38 x 2.5 tube
Hitch point X 0, Y -95, Z 340 (bike left axle end)
Load cell X 840 to 950, coupler to X 1150, on center line
Coupler stroke 50; enclosure 320 x 300 x 170
Ground clearance 208 under enclosure; tyre to rail 22.5
Empty about 43 kg; hitch load about 7.8 kg (CGM-CAL-001)
Third-angle; front view from -Y; X rearward from bike axle

CARGOMULE

General arrangement

DRAWING NO. CGM-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES S235 box frame, S355 drawbar; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	