


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Key switch and charge socket holes in the right wall	2026-10-02	AC




TOP VIEW

Scale 1:5; looking down (along -Z)

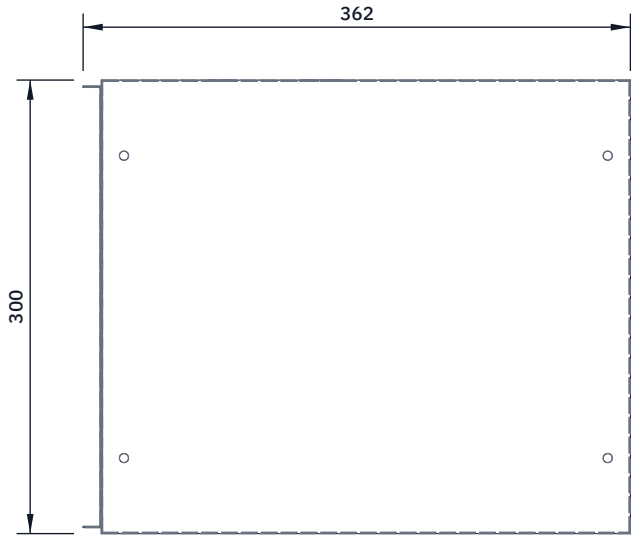


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

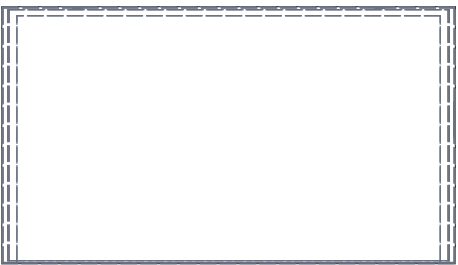

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

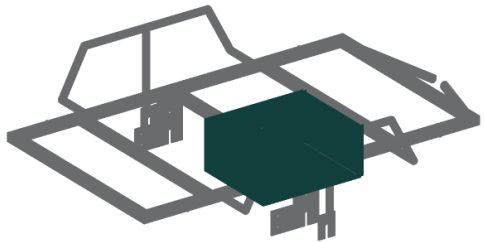

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Box 350 long x 300 wide x 170 tall, folded from 0.8 mm galvanized sheet, seams riveted and sealed. Closed top.

Front face (toward the drawbar): door opening 280 x 163 mm, centred, from the floor up; the pack slides out through it.

Door: 292 x 166 mm with 11 mm folded sides, hinged along its bottom edge, a keyed lock at the top, a foam gasket.

Top: four 6.5 mm holes 15 and 335 mm from the front face, 100 mm each side of centre, with a 1.5 mm steel doubler strip inside under each pair.

Vent low on the rear face, pointing down and away from the load; cable glands on the left, right and rear faces.

Right wall, near the front: 19 mm hole (key switch) 80 mm and 24 mm hole (charge socket) 145 mm behind the front face, both 95 mm up; socket's two 3.2 mm screw holes from the socket.

Fit: four M6 bolts from inside, up into the rivet nuts in the crossmembers, with large washers.

Check: the pack slides in and out with the door open.

CARGOMULE

github.com/BoujeeEnjinia1701/cargomule

CargoMule battery enclosure and door: making sketch

DRAWING NO. CGM-DWG-110			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Galvanized steel sheet 0.8 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand