



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

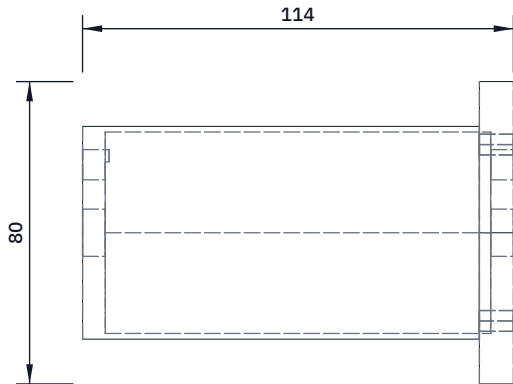


TOP VIEW

Scale 1:2; looking down (along -Z)

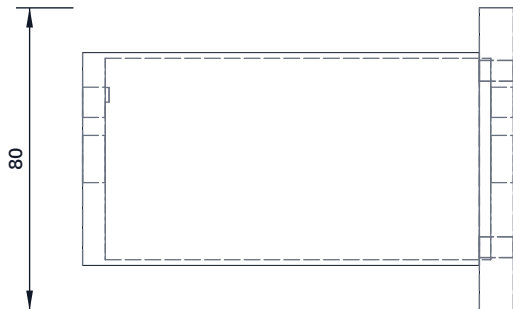


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

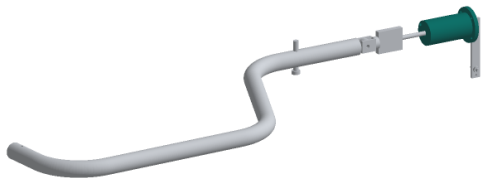

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Spring cage: tube 56.3 x 1.5 mm, 105 mm long, a sliding fit in the housing bore.

Bulkhead: 6 mm disc welded inside the cage's front end, 12.5 mm centre hole for the pull rod and an 8 mm hole for the load cell cable, 18 mm right of and 15 mm above the centre.

Ring: 80 mm OD x 3 mm, welded on the cage's rear end, four 5.5 mm holes on a 66 mm circle to match the housing flange.

End cap: 80 mm OD x 6 mm disc, the same four holes, a 12.5 mm centre hole for the pull rod's tail and an 8 mm cable hole lined up with the bulkhead's (fit a small cable gland).

The ring is clamped between the housing flange and the end cap by four M5 screws; the rod's pull is carried by the bulkhead, the cage and the ring.

Check: the cage slides fully home by hand.

CARGOMULE

github.com/BoujeeEnjinia1701/cargomule

CargoMule spring cage and end cap: making sketch

DRAWING NO. CGM-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel tube 56.3 x 1.5 mm; plate 3 and 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand