



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

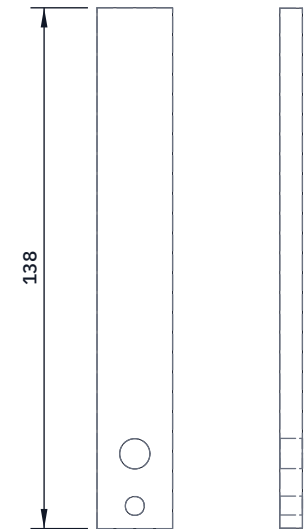

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 138 mm of 20 x 6 mm flat bar; round both ends.
Pivot hole 8.2 mm, 20 mm from the bottom end.
Cable hole 5 mm, 6 mm from the bottom end: 13.8 mm below the pivot.
The pull rod's tail pushes the lever's face 106 mm above the pivot, so the cable end moves 7.7 times less and pulls 7.7 times harder than the rod.
Fit: between the housing's cheeks on an M8 bolt with two spring washers each side, set so the lever swings with a light drag (this is the coupler's damping).
At rest the rod's tail is 2 mm short of the lever.
Check: the lever swings freely through 30 degrees.

CARGOMULE

github.com/BoujeeEnjinia1701/cargomule

CargoMule brake lever: making sketch

DRAWING NO. CGM-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel flat bar 20 x 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand