



CONCEPT, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA (CCK-CAL-001, CCK-DDR-001)	2026-09-25	AC

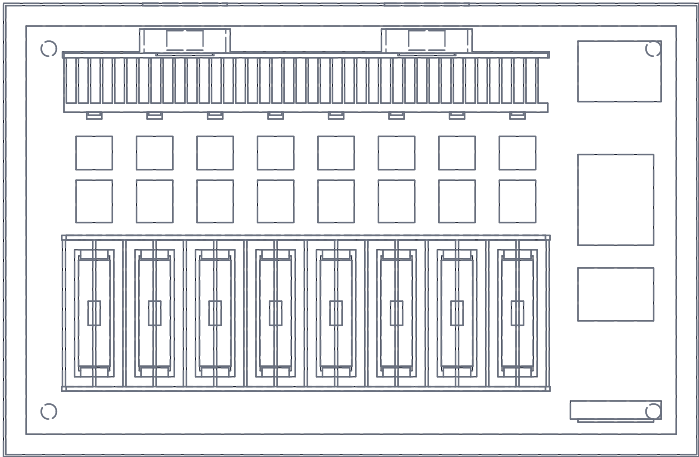


TOP VIEW
Scale 1:5



FRONT VIEW
Scale 1:5



RIGHT VIEW
Scale 1:5

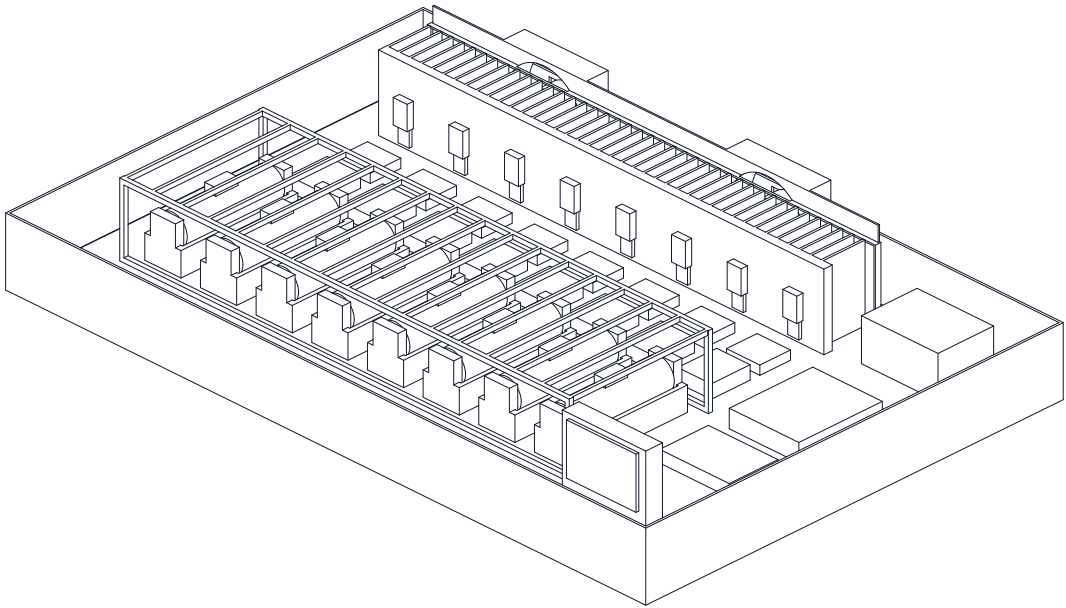

ISOMETRIC VIEW
Not to scale; cells shown for reference

KEY DIMENSIONS AND INTERFACES (MM)

Unit envelope 460 x 300 x 75; tray 1.5 steel, liner 3
8 channels at 40 pitch, channel 1 at x -170; cells along Y at y -55
Holders accept 18650 and 21700 (cell to 70 long, 21 dia)
Four-wire contacts: force and sense at each cell end
Cell axis 35 above bench; guard top 63.5
Heatsink 320 x 36 x 50: 40 fins at 8 pitch
2 fans 60 mm on shroud, air into fins, out at top
Fan intake slots 56 x 22 in tray back wall
12 V DC inlet only, 6.3 A fuse; 3 A fuse per cell
Watchdog and 2.5 V comparator board (item 18)
Rest rack (48 cells) and adapter stand beside the tray
Mass about 4.97 kg without adapter (CCK-CAL-001)
PRELIMINARY, NOT FOR FABRICATION

CELLCHECK

General arrangement, eight-channel grader

DRAWING NO. CCK-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Tray 1.5 mm steel; plate 2 mm Al; heatsink Al; guard 0.8 mm perforated steel. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com					Generated from cad/src; do not edit by hand