



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

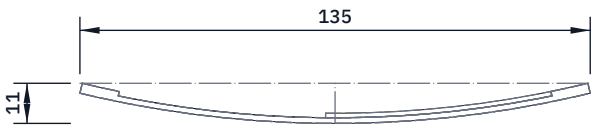

TOP VIEW

Scale 1:2; looking down (along -Z)

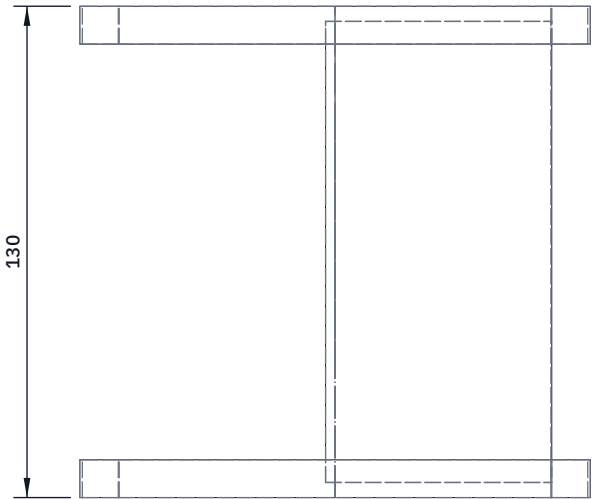

FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Damper: cut four 60 x 122 mm plates from 1.2 mm sheet; roll each to the drum's curve (286 mm radius) by hand over a pipe.

Guides: eight strips 10 mm wide x about 135 mm long from 1.5 mm strip. Joggle 10 mm at each end by 1.2 mm so the ends sit on the drum and the middle stands off it by the damper's thickness.

Fit: one guide just below each port (its top edge 6 mm over the damper's lower edge), one just above. Two 4.8 mm rivets per guide, through the joggled ends, which sit beyond the damper's travel.

The damper slides sideways 55 mm: closed it covers the port with 6 mm to spare all round; open it clears the port.

Check: the damper slides by hand and stays where it is put.

CHARCUBE

github.com/BoujeeEnjinia1701/charcube

CharCube port damper and guide strips (make 4 sets): making sketch

DRAWING NO. CCB-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel sheet 1.2 mm and strip 1.5 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	