


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW
Scale 1:20; looking down (along -Z)

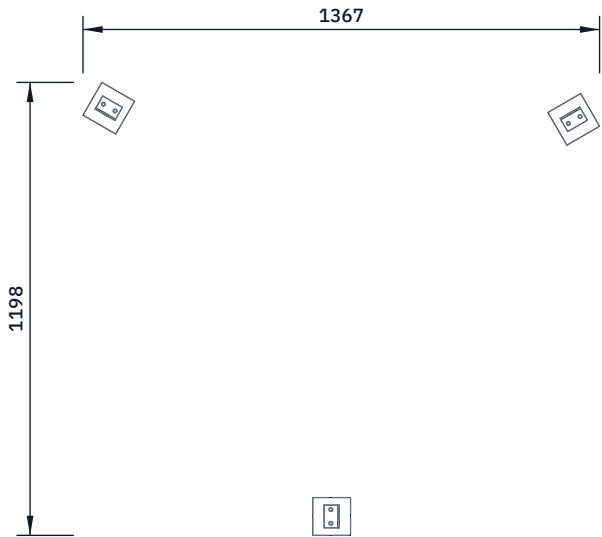

FRONT VIEW
Scale 1:20; looking at the front (along +Y)



RIGHT VIEW
Scale 1:20; looking at the right side (along -X)



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Cleat: a 60 mm length of 40 x 40 x 4 angle.
- Upright face: one 11 mm hole at mid-length, 24 mm up from the underside of the flat face (the leg's pin).
- Flat face: two 9 mm holes, 18 mm each side of the middle, 22 mm in from the heel.
- Pad: a 100 x 100 mm square of 6 mm plate; two 9 mm holes to match the cleat, countersunk from below.
- Fit: M8 countersunk screws up through the pad, nyloc nuts on the cleat. The leg's flat face lies on the cleat's upright face, outside it; one M10 bolt, nyloc nut, snug (the leg can pivot).
- Check: the pad sits flat with the screw heads flush.

CharCube foot cleat and pad (make 3 sets): making sketch

DRAWING NO. CCB-DWG-111			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Steel angle 40 x 40 x 4 mm; plate 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		