



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW
Scale 1:50; looking down (along -Z)

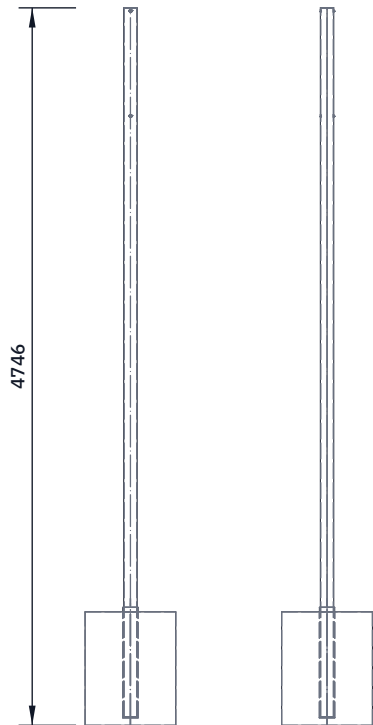

FRONT VIEW
Scale 1:50; looking at the front (along +Y)

RIGHT VIEW
Scale 1:50; looking at the right side (along -X)



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Footing: dig a hole 600 x 600 x 750 deep, 1.2 m straight behind the kiln's centre. Ground sleeve: 730 mm of 101.6 x 3.6 tube with a 6 mm plate in its bottom end (a welder tacks it, or a bolt across the tube holds a loose plate). Stand it 30 mm proud and plumb; fill with concrete; wait at least three days.

Post: 4.69 m of 88.9 x 3.2 tube; a 3 mm cap plate in the top end. Two 17 mm holes across it: 20 mm and 715 mm below the post's top end (CCB-DWG-116).

Fit: two people stand the post in the sleeve; it turns by hand.

Check: plumb both ways; the post turns freely through 90 degrees.

CHARCUBE

github.com/BoujeeEnjinia1701/charcube

CharCube lifting aid: post, ground sleeve and footing

DRAWING NO. CCB-DWG-115			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:50	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel tube 88.9 x 3.2 and 101.6 x 3.6 mm; concrete					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand