


**Control Theory**  
**Assignment #2**

**Name:** Pilar Genoveva Górriz Soriano  
**Date:** 31/10/2023

---

1. Find a transfer function of the second-order system  $G(s)$  that has undamped oscillations and oscillates with a frequency of  $f = 6\text{Hz}$ . Note that  $\omega = 2\pi f$ . In Simulink, check that the response of this transfer function to the unit step meets the requirements.
2. Determine the transfer function  $\frac{Y(s)}{U(s)}$  of the following block diagram.

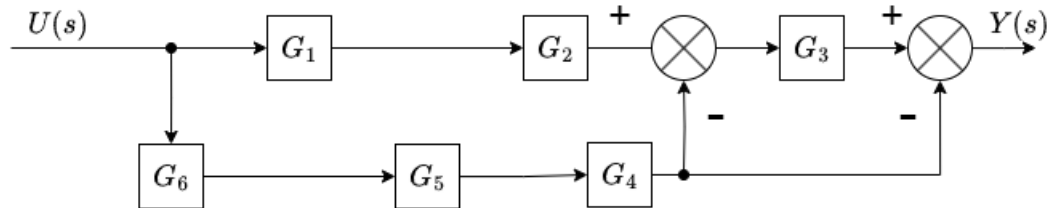

3. Determine the time delay of the following transfer function:

$$G(s) = e^{-1.5s} \frac{19}{s + 4}$$

Approximate the behavior of the time delay with the second-order Padé approximation.

4. Using both manual and Ziegler-Nichols tuning methods, set up a PID controller that would control a plant with the following transfer function.

$$G(s) = \frac{1}{s^3 + 3.75s^2 + 7.70s + 3.08}$$

Show the resulting control loops in the Simulink environment.