



CONCEPT, NOT FOR FABRICATION

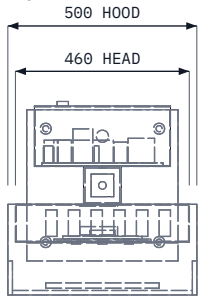


TOP VIEW
Scale 1:20

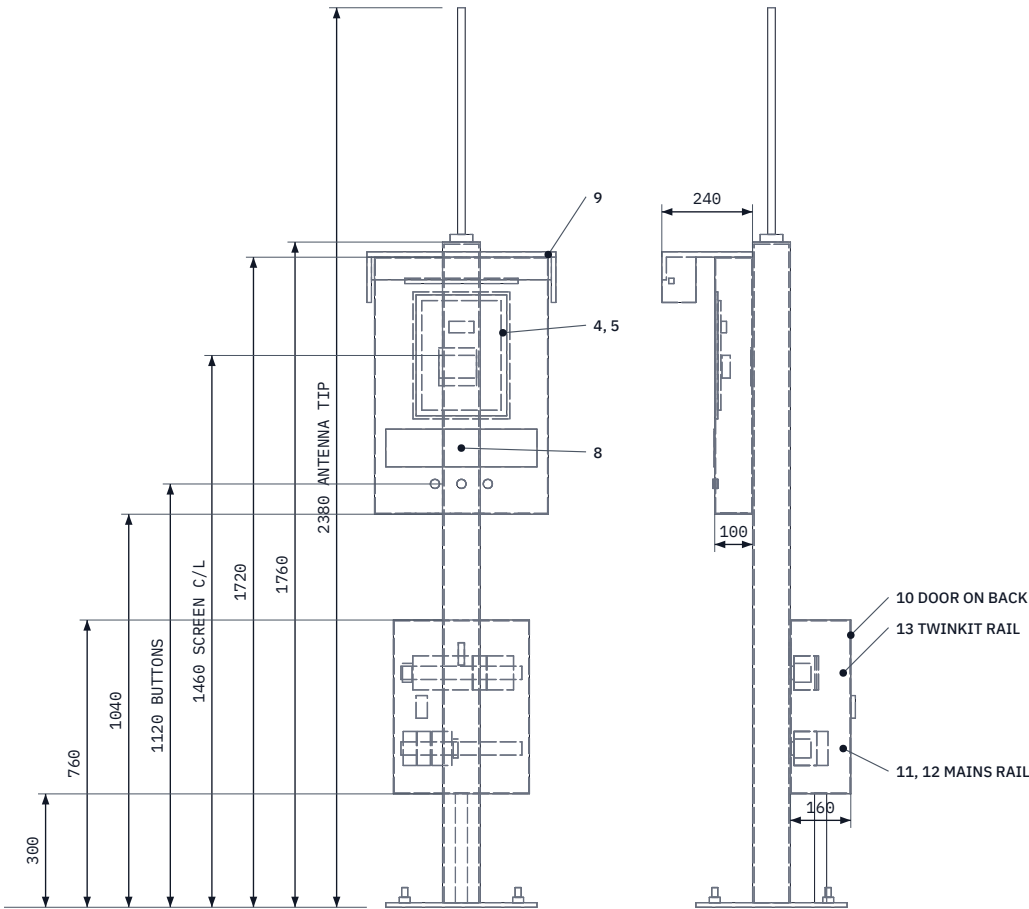

FRONT VIEW
Scale 1:20

SIDEWALK Z = 0

RIGHT VIEW
Scale 1:20

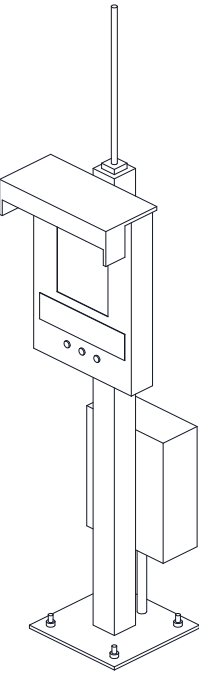

ISOMETRIC VIEW
Not to scale

MAIN DIMENSIONS AND INTERFACES (MM)

2 post 100 x 100 x 4 SHS; 1 base 400 x 400 x 12, 4 x M16 on 300 sq
3 head 460 x 100 x 680, 2 mm aluminum, IP54 target
4 window 240 x 320 opening, 6 mm PC; 5 active area 202.8 x 270.4
7 three 19 mm buttons at 70 pitch; reach range 380 to 1,220
Overhang beyond post 200 max (305 allowed on posts)
10 cabinet 360 x 160 x 460, IP55; two TS35 rails 320 long
Upper rail: TwinKit per TWK-DWG-001, 294 used; lower: RCBO, SPD, 12 V 60 W
Mains only in the cabinet; 12 V SELV and Ethernet up the post
14 coax from TwinKit SMA bulkhead to post-top antenna
Wind 35 m/s x 1.5: post 26.2 MPa; 1.92 kN per anchor (CTW-CAL-001)
Third-angle; front view from -Y (reading side)

CITYTWIN

General arrangement, public kiosk

DRAWING NO.

CTW-DWG-001

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-09-25

DRAWN

Amish Chadha

MATERIAL / NOTES

Steel post and plate, aluminum head; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION