


Control Theory
Assignment #2

Name: Emma Antonia Chaparro Bailey
Date: 31/10/2023

1. Find a transfer function of the second-order system $G(s)$ that has undamped oscillations and oscillates with a frequency of $f = 11\text{Hz}$. Note that $\omega = 2\pi f$. In Simulink, check that the response of this transfer function to the unit step meets the requirements.
2. Determine the transfer function $\frac{Y(s)}{U(s)}$ of the following block diagram.

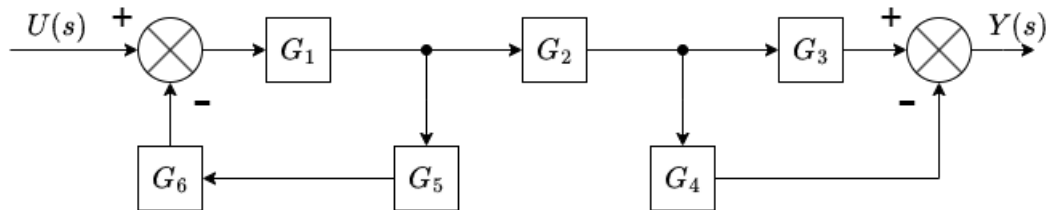

3. Determine the time delay of the following transfer function:

$$G(s) = e^{-1.1s} \frac{2}{s + 9}$$

Approximate the behavior of the time delay with the second-order Padé approximation.

4. Using both manual and Ziegler-Nichols tuning methods, set up a PID controller that would control a plant with the following transfer function.

$$G(s) = \frac{1}{s^3 + 2.25s^2 + 3.00s + 2.00}$$

Show the resulting control loops in the Simulink environment.