



CONCEPT, NOT FOR FABRICATION

CityTwin · github.com/BoujeeEnjinia1701/citytwin



TOP VIEW

Scale 1:25; looking down (along -Z)

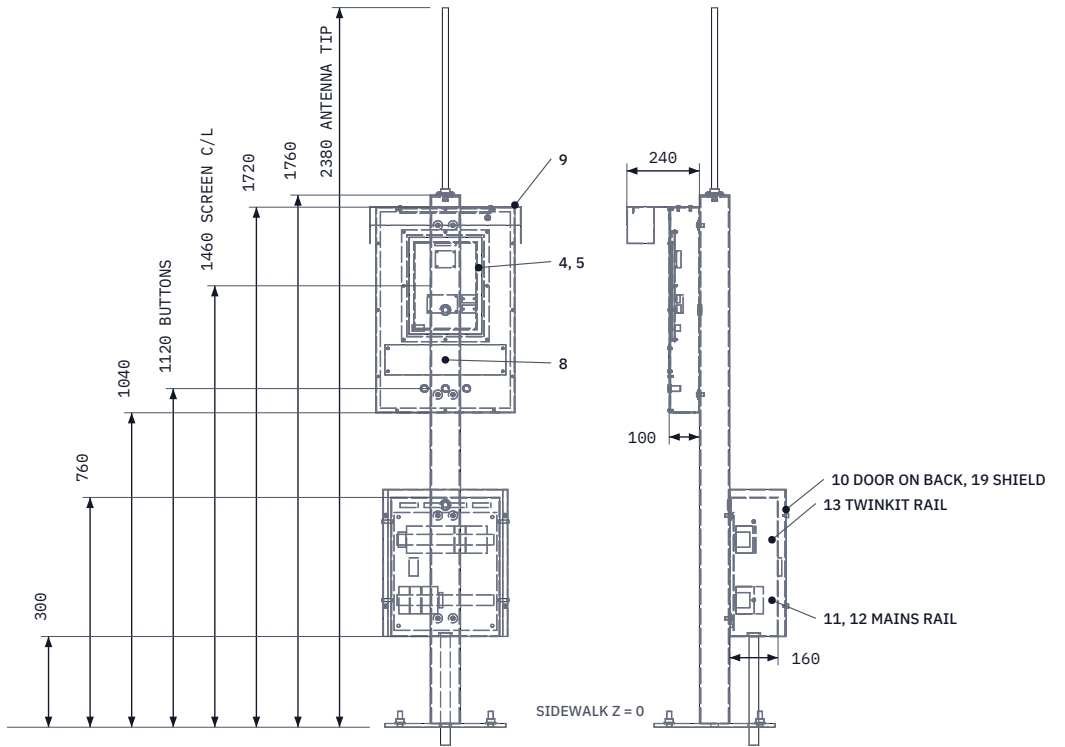


FRONT VIEW

Scale 1:25; looking at the front (along +Y)

RIGHT VIEW

Scale 1:25; looking at the right side (along -X)

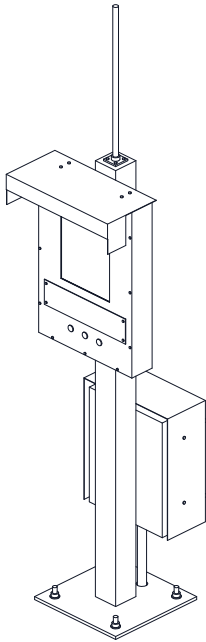

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

2 post 100 x 100 x 4 SHS; 1 base 400 x 400 x 12, 4 x M16 on 300 sq

3 head 460 x 100 x 680, 2 mm aluminum, IP54 target

4 window 240 x 320 opening, 6 mm PC; 5 active area 202.8 x 270.4

7 three 19 mm buttons at 70 pitch; reach range 380 to 1,220

Overhang beyond post 200 max (305 allowed on posts)

10 cabinet 360 x 160 x 460, IP55; two TS35 rails 320 long

19 sun shield (outdoor sites) 413 wide, 1.5 mm aluminum, 25 gap, on 4 standoffs

Upper rail: TwinKit per TWK-DWG-001, 294 used; lower: RCBO, SPD, 12 V 60 W

Mains only in the cabinet; 12 V SELV and Ethernet up the post, 25 mm grommets holes

14 coax from TwinKit SMA bulkhead to post-top antenna

Wind 35 m/s x 1.5: post 26.6 MPa; 1.94 kN per anchor (CTW-CAL-001 v0.3)

Third-angle; front view from -Y (reading side)

CITYTWIN

github.com/BoujeeEnjinia1701/citytwin

General arrangement, public kiosk

DRAWING NO.

CTW-DWG-001

REV

P4

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:25

UNITS

mm

PROJECTION



DATE

2026-09-25

DRAWN

Amish Chadha

MATERIAL / NOTES

Steel post and plate, aluminum head; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION