



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

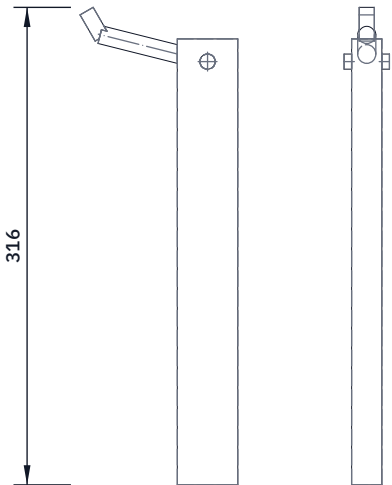

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Post: 40 x 20 mm bar, 295 mm, welded upright on the crossbar 20 mm toward the pump end from the shaft centre, 100 mm in from the front sill centre line.

Pivot: 10 mm hole 280 mm above the crossbar top.

Pawl: 12 mm round bar from the pivot to the nose, about 75 mm; nose block 20 x 10 x 10 mm welded on the end.

Pin: 10 mm, 30 mm long, with a washer and split pin.

Spring: light tension spring from the pawl to the post keeps the nose on the ratchet.

Check: turning the wheel forward the pawl clicks over each tooth; turning it back the pawl locks it at once.

COLLARDRIVE

github.com/BoujeeEnjinia1701/collardrive

CollarDrive backstop pawl and post: making sketch

DRAWING NO. CLD-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 40 x 20 mm flat bar, 12 mm round bar, 10 mm pin; spring					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand