



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

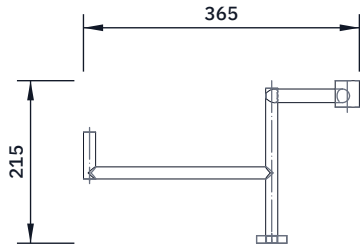

TOP VIEW

Scale 1:10; looking down (along -Z)

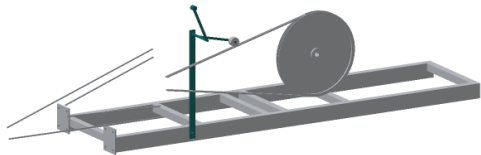

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Pivot post: 40 x 10 mm flat bar, 725 mm, welded to the outside of the back sill 700 mm from the shaft centre; one M12 bolt through the sill as a second fixing.

Pivot hole 16 mm, 620 mm above the sill top.


Pivot pin: 16 mm bar 195 mm, through the post and the belt guard, welded to the arm and the lever.

Arm: 16 mm bar from the pivot to the idler axle, about 250 mm; idler axle 16 mm, 62 mm long.

Lever: 18 mm bar 250 mm up from the pivot outside the guard, with a 32 mm knob.

Over centre: in the up position the idler presses the slack strand 25 mm; latch the lever in the guard plate.

Check: lever down, the pump belts go slack and the wheel stops while the layshaft turns.

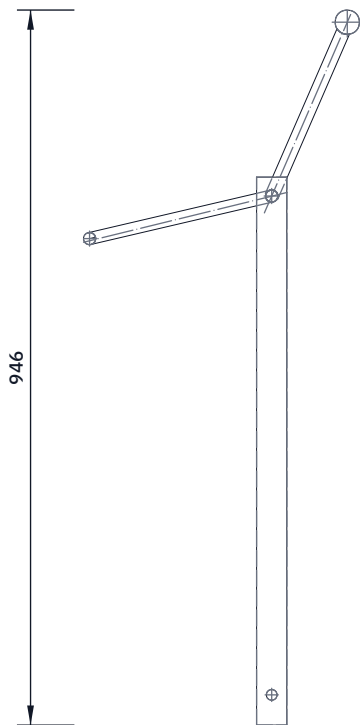

FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

COLLARDRIVE

github.com/BoujeeEnjinia1701/collardrive

CollarDrive clutch lever and pivot post: making sketch

DRAWING NO.

CLD-DWG-111

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-10-03

DRAWN

Amish Chadha

MATERIAL / NOTES

16 and 18 mm round bar, 40 x 10 mm flat bar; bought idler