



CONCEPT, NOT FOR FABRICATION

ConePro · [github.com/BoujeeEnjinia1701/conepro](https://github.com/BoujeeEnjinia1701/conepro)




TOP VIEW

Scale 1:20; looking down (along -Z)

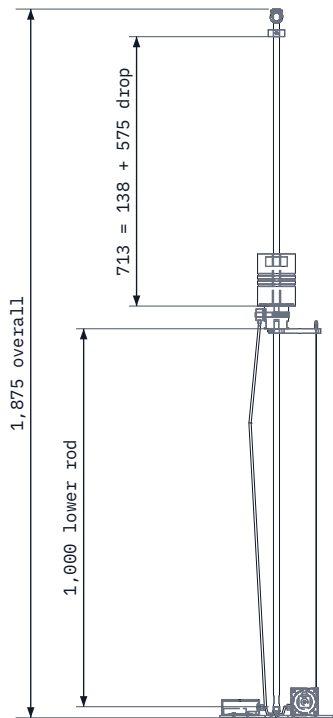


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

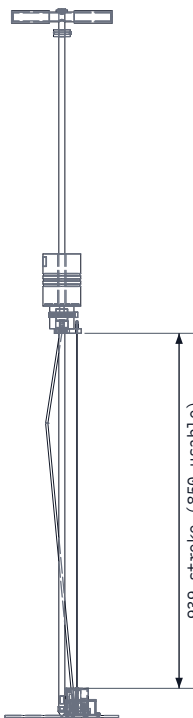


RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

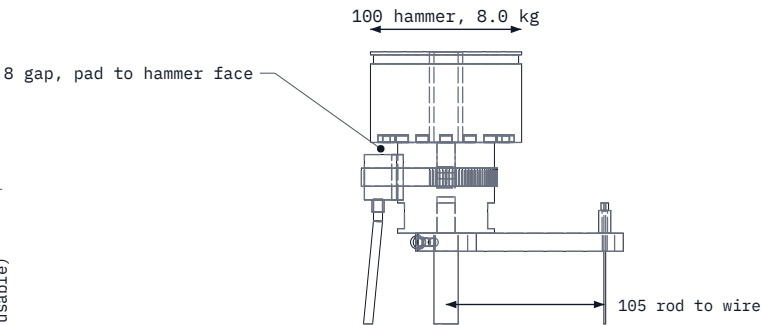

DETAIL A: ANVIL, SENSOR PAD AND CLAMP

Front view, scale 1:5



ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

ASTM D6951: 8.0 kg hammer, 575 drop, 16 rod, 20 cone at 60 deg  
Hammer 100 OD x 22 bore x 138.0; anvil 64 x 60  
Upper rod 778; stop collar 44 x 18; T-handle 260 wide  
Plate 300 x 300 x 6 Al; 60 hole, 60 slot  
Draw-wire exit at X 105, Y 40; 60 grooved drum, single layer  
One-piece aluminum clamp, 40 collar against the anvil underside  
M12 rod joints, no thread locker; spanner flats 17 A/F cone, 13 A/F rod, 55 A/F anvil  
Hammer: 3 grip grooves; 33 rubber grips on the T-handle  
End cap 32 x 24 on the upper rod stud whenever it is off the anvil  
Sensor pad on a band clamp (50 to 80 anvils), 8 below anvil top  
Stroke 939, limited by the wire arm on reel housing  
About 15.8 kg with bag; heaviest piece 9.96 kg (CNP-CAL-001 v0.6)  
Third-angle; front view from -Y; ground at Z 0

CONEPRO

[github.com/BoujeeEnjinia1701/conepro](https://github.com/BoujeeEnjinia1701/conepro)

General arrangement

DRAWING NO.

CNP-DWG-001

REV

P6

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Steel rods, anvil, hammer; aluminum plate and clamp; parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · [designmolecule.com](https://designmolecule.com)

Generated from cad/src; do not edit by hand