



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	55 mm spanner flats; no thread locker	2026-10-02	AC

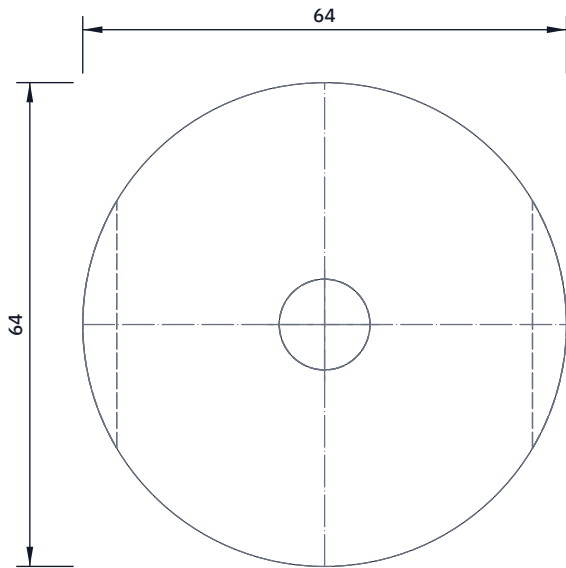


TOP VIEW

Scale 1:1; looking down (along -Z)

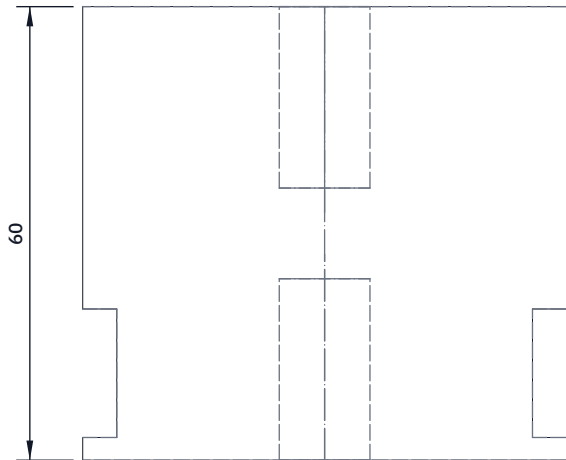


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

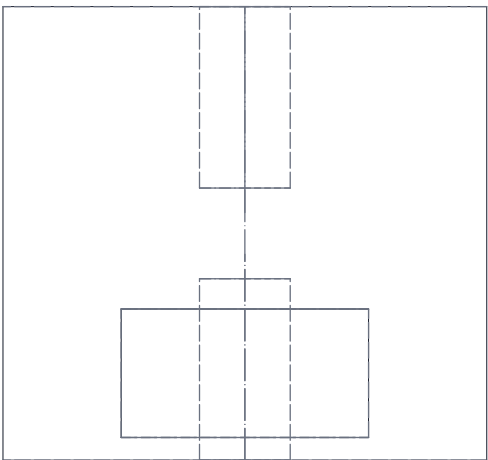

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

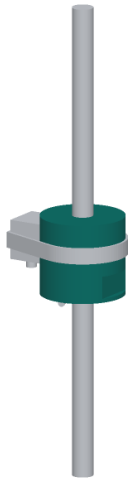

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn to 64 mm diameter x 60 mm long; face both ends square and parallel within 0.1 mm. Chamfer the outer edges 1 mm.

Both end faces: centre drill, drill 10.2 mm 27 mm deep and tap M12 x 1.75 to 24 mm deep. The two holes do not meet.

Spanner flats: mill two flats 55 mm across, 17 mm long, starting 3 mm above the bottom face, below the sensor pad.

The top face takes every hammer blow: leave it flat and smooth.

Fit: both rod studs screw in to their shoulders with no thread locker, tightened with a 55 mm spanner on the anvil and the rod flats or T-handle. The clamp collar butts the bottom face; the sensor pad and band clamp onto its side.

Check: both rods seat on their shoulders with no rock; the anvil spins true on the rod within 0.2 mm.

CONEPRO

github.com/BoujeeEnjinia1701/conepro

ConePro anvil: making sketch

DRAWING NO. CNP-DWG-104			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel round bar 70 mm, 1045 or 4140 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	