




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	Grip grooves; length set to keep 8.00 kg; label	2026-10-02	AC

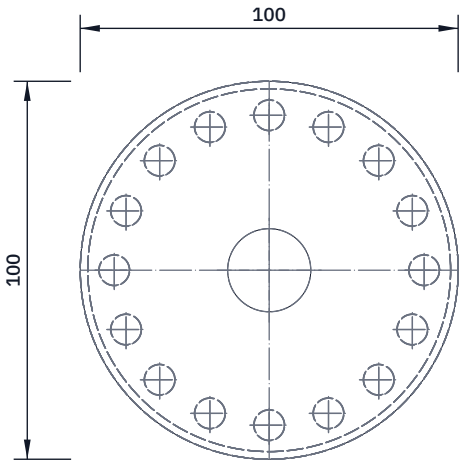


TOP VIEW
Scale 1:2; looking down (along -Z)

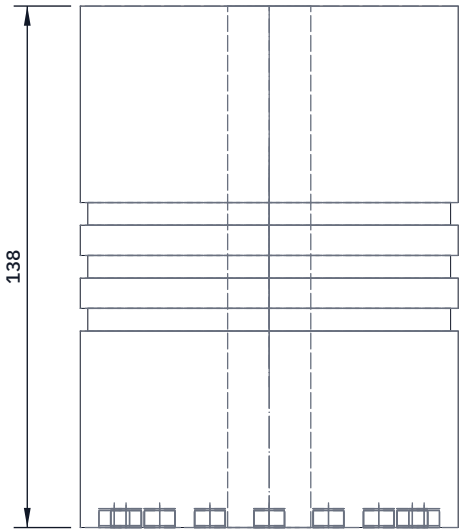

FRONT VIEW
Scale 1:2; looking at the front (along +Y)

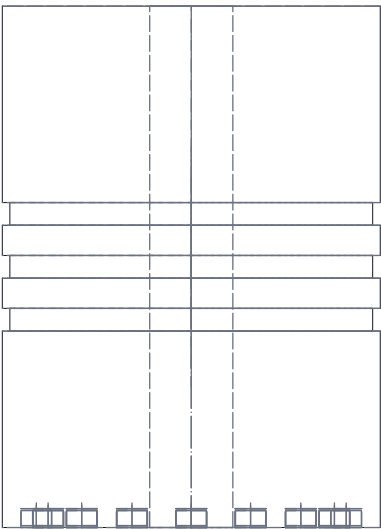

RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

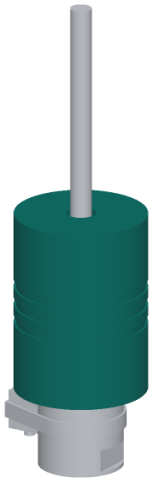

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Saw 140 mm of 100 mm bar. Bore 22 mm through.
Face both ends square; the lower face strikes the anvil.
Lower face: 16 pockets 8.2 mm diameter, 5 mm deep, equally spaced (22.5 degrees) on an 82 mm circle, all outside the 64 mm area that strikes the anvil.
Grip grooves: turn 3 grooves 6 mm wide and 2 mm deep, 14 mm apart, centred on the middle of the length.
Weigh, then face the top end down to 8.00 kg, within 10 g.
The length is set at machining (about 138.0 mm).
Bond a 8 x 4 mm N42 magnet in each pocket with epoxy, 0.5 mm below the face, every one with the same pole facing down.
Paint or oil the outside; keep the strike face bare. Stick the "fit the end cap" label above the grooves.
Fit: slides on the upper rod (3 mm clearance all round) and falls 575 mm onto the anvil.
Check: 8.00 kg; slides freely the length of a 16 mm rod; no magnet stands proud of the face.

ConePro drop hammer: making sketch

DRAWING NO. CNP-DWG-105			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel round bar 100 mm, 1018 to 1045 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	