



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	Heights for the grooved hammer	2026-10-02	AC

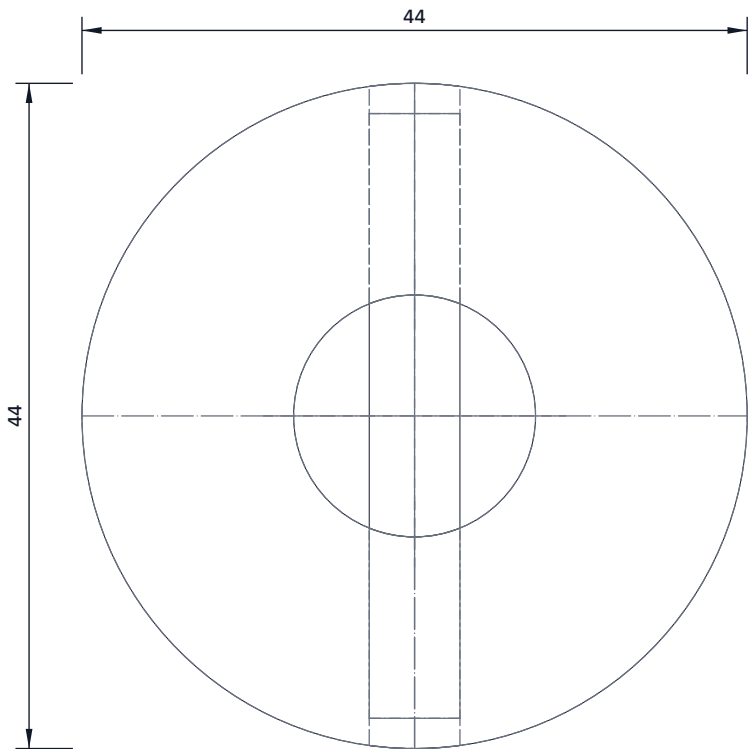


TOP VIEW

Scale 2:1; looking down (along -Z)

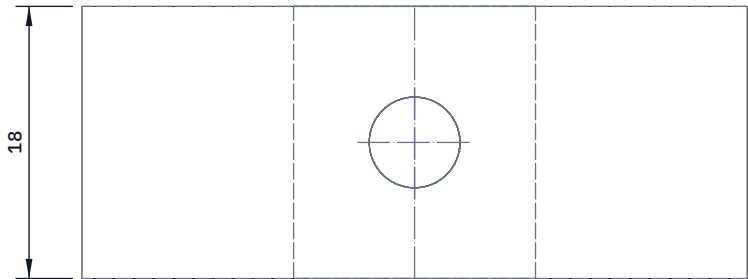


FRONT VIEW

Scale 2:1; looking at the front (along +Y)

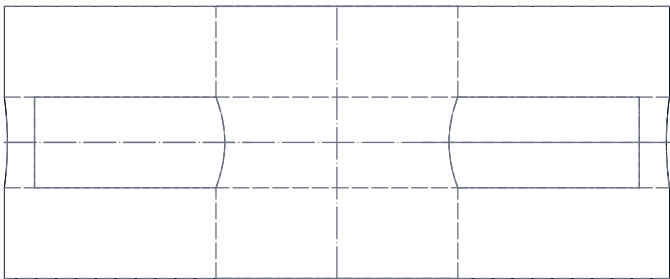

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

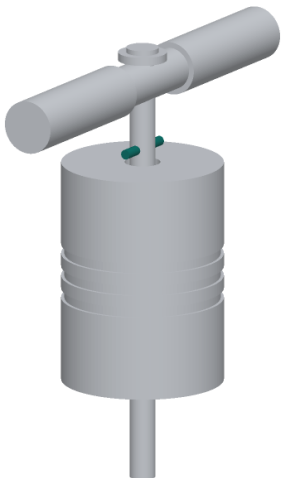

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn to 44 mm diameter x 18 mm; bore 16 mm, a close slide fit.
Face both ends square; the hammer's top face hits the underside.
Slide it on the upper rod from the top so its underside is 713.0 mm above the rod shoulder. With the 138.0 mm hammer this gives the 575 mm free drop. Set it with a rule and check the drop with the hammer on a flat plate standing for the anvil.
Clamp it there and drill 6 mm straight through collar and rod together, at mid-height (722.0 mm above the shoulder).
Drive in a 6 x 40 mm spring steel roll pin; its ends sit just inside the collar's outside surface.
Check: the free drop is 575 mm, within 2 mm; the collar does not move when the hammer is jerked up against it.

CONEPRO

github.com/BoujeeEnjinia1701/conepro

ConePro top stop collar: making sketch

DRAWING NO. CNP-DWG-107			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel round bar 50 mm, 1018 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	