



CONCEPT, NOT FOR FABRICATION

ConePro · github.com/BoujeeEnjinia1701/conepro




TOP VIEW

Scale 1:20; looking down (along -Z)

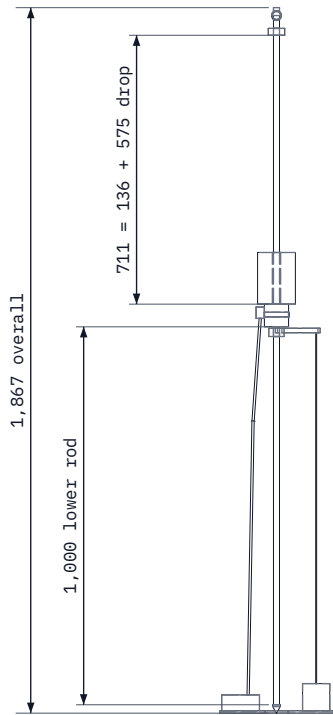


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

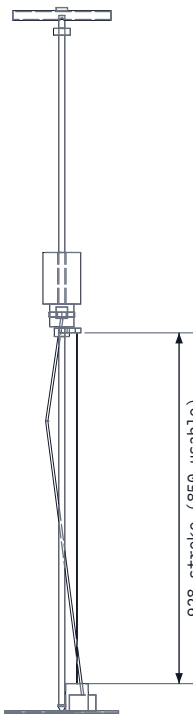


RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

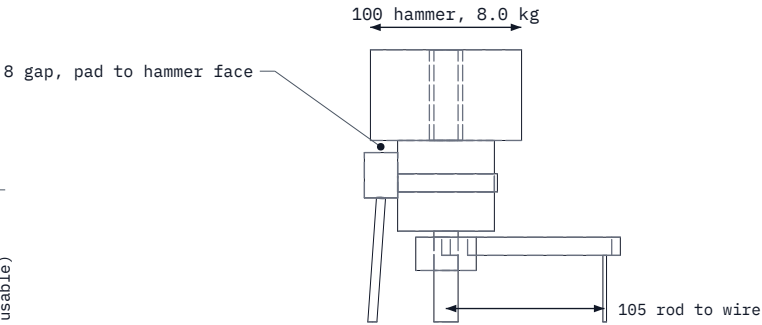

DETAIL A: ANVIL, SENSOR PAD AND CLAMP

Front view, scale 1:5

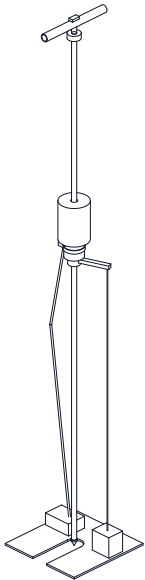

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

- ASTM D6951: 8.0 kg hammer, 575 drop, 16 rod, 20 cone at 60 deg
- Hammer 100 OD x 22 bore x 136.4; anvil 64 x 60
- Upper rod 729; stop collar 44 x 18; T-handle 260 wide
- Plate 300 x 300 x 6 Al; 60 hole, 60 slot
- Draw-wire exit at X 105, Y 40; 60 grooved drum, single layer
- Aluminum clamp collar 40 on the rod, 4 below the anvil
- Sensor pad on a band clamp (50 to 80 anvils), 8 below anvil top
- Stroke 928, limited by the wire arm on reel housing
- About 15.7 kg with bag; heaviest piece 9.8 kg (CNP-CAL-001)
- Third-angle; front view from -Y; ground at Z 0

CONEPRO

github.com/BoujeeEnjinia1701/conepro

General arrangement

DRAWING NO.

CNP-DWG-001

REV

P4

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-09-27

DRAWN

Amish Chadha

MATERIAL / NOTES

Steel rods, anvil, hammer; aluminum plate and clamp; parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand