


CONCEPT, NOT FOR FABRICATION


| REV | DESCRIPTION   | DATE       | BY |
|-----|---------------|------------|----|
| P1  | Concept sheet | 2026-09-25 | AC |




TOP VIEW  
Scale 1:20



FRONT VIEW  
Scale 1:20



RIGHT VIEW  
Scale 1:20

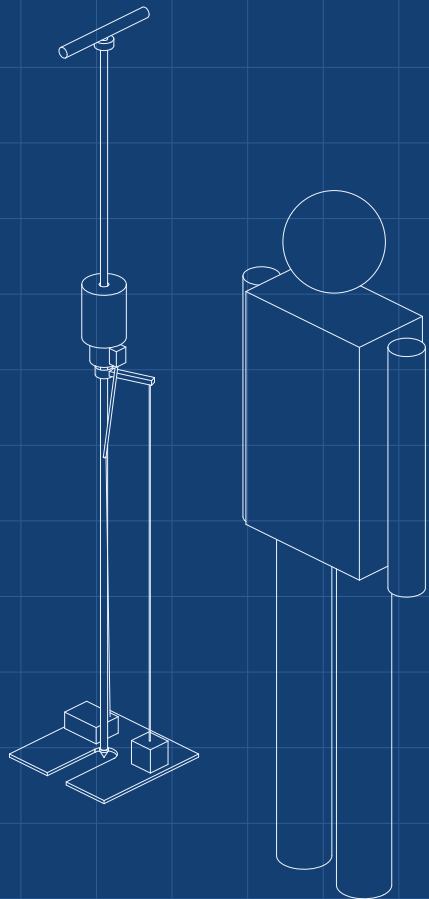

ISOMETRIC VIEW  
Not to scale; figure is a 1.75 m person

KEY FIGURES

ASTM D6951 geometry: 8 kg hammer, 575 mm drop  
About 45 J per blow; 16 mm rod, 20 mm 60 deg cone  
Draw-wire depth: 1 mm resolution target  
About 850 mm per rod; about 15 kg (estimate)  
About \$300 in parts (indicative)

CONEPRO

Digital dynamic cone penetrometer concept

|                            |           |                 |                |
|----------------------------|-----------|-----------------|----------------|
| DRAWING NO.<br>CNP-DWG-010 | REV<br>P1 | SHEET<br>1 of 1 | SIZE<br>ANSI B |
|----------------------------|-----------|-----------------|----------------|

|               |             |                |                    |                       |
|---------------|-------------|----------------|--------------------|-----------------------|
| SCALE<br>1:20 | UNITS<br>mm | PROJECTION<br> | DATE<br>2026-09-25 | DRAWN<br>Amish Chadha |
|---------------|-------------|----------------|--------------------|-----------------------|

|                                                             |
|-------------------------------------------------------------|
| MATERIAL / NOTES<br>Massing model for concept communication |
|-------------------------------------------------------------|