



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	6 mm plate, aluminum clamp, 15.7 kg (CNP-DDR-002)	2026-09-25	AC




TOP VIEW
Scale 1:20

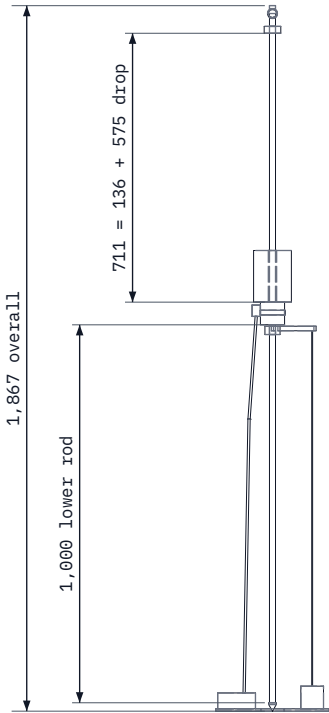


FRONT VIEW
Scale 1:20

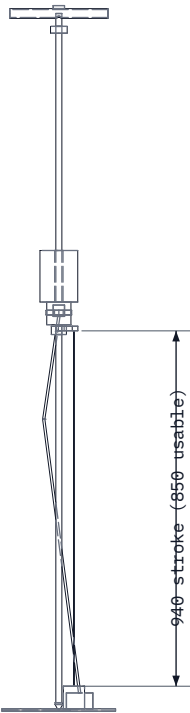

RIGHT VIEW
Scale 1:20

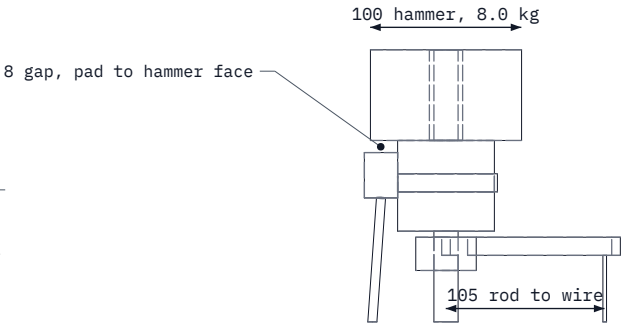

DETAIL A: ANVIL, SENSOR PAD AND CLAMP
Front view, scale 1:5

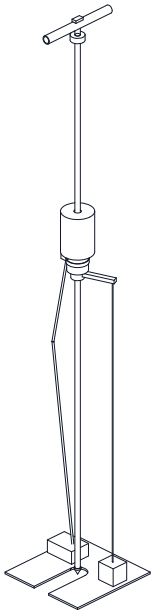

ISOMETRIC VIEW
Not to scale

MAIN DIMENSIONS AND INTERFACES (MM)

ASTM D6951: 8.0 kg hammer, 575 drop, 16 rod, 20 cone at 60 deg
Hammer 100 OD x 22 bore x 136.4; anvil 64 x 60
Upper rod 729; stop collar 44 x 18; T-handle 260 wide
Plate 300 x 300 x 6 Al; 60 hole, 60 slot
Draw-wire exit at X 105, Y 40; 60 grooved drum, single layer
Aluminum clamp collar 40 on the rod, 4 below the anvil
Sensor pad on a band clamp (50 to 80 anvils), 8 below anvil top
Stroke 940, limited by the wire arm on reel housing
About 15.7 kg with bag; heaviest piece 9.8 kg (CNP-CAL-001)
Third-angle; front view from -Y; ground at Z 0

CONEPRO
General arrangement

DRAWING NO. CNP-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Steel rods, anvil, hammer; aluminum plate and clamp; parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	