BUILD PLAN SKETCH, PLAN NOT YET BUILT

CoolShade · github.com/BoujeeEnjinia1701/coolshade

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

TOP VIEW

Scale 1:25; looking down (along -Z)

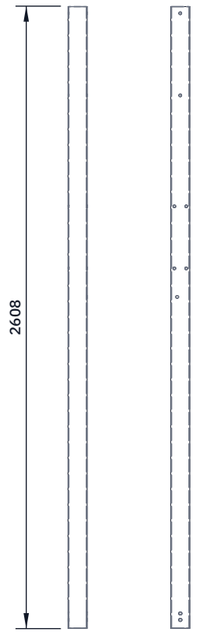

FRONT VIEW

Scale 1:25; looking at the front (along +Y)

RIGHT VIEW

Scale 1:25; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two rear posts, 2,608 mm long; cut both ends square.
All holes go through both walls, on the face's centre line unless stated. Heights from the bottom end.
Left and right faces: 13 mm at 35 and 62 mm up (base cleats); 11 mm at 28 mm below the top (head cleats); 11 mm at 372.5 mm below the top (knee brace).
Rear right only: four 11 mm holes through both side faces, 25 mm each side of centre, 1,510 and 1,770 mm up (enclosure rails), countersunk on the outer face; a 12 mm cable hole in the outer face, 13 mm toward the street, 1,390 mm up.
Rear left only: two 11 mm holes through the street face and back face on the centre line, 780 and 1,340 mm up (equipment plate); a 12 mm cable hole in the street face, 25 mm toward the canopy, 1,330 mm up.
Deburr every hole; zinc-rich paint on cut ends and holes.
Hole positions: figure post-holes in the build plan.
Check: holes in opposite faces line up (a rod passes square).

COOLSHADE

github.com/BoujeeEnjinia1701/coolshade

CoolShade rear post (make 2, a left and a right): making sketch

DRAWING NO.	REV	SHEET	SIZE
CSH-DWG-104	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:25	mm		2026-09-30	Amish Chadha

MATERIAL / NOTES

Galvanized steel SHS 80 x 80 x 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand