BUILD PLAN SKETCH, PLAN NOT YET BUILT

CoolShade · github.com/BoujeeEnjinia1701/coolshade

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

TOP VIEW

Scale 1:20; looking down (along -Z)

FRONT VIEW

Scale 1:20; looking at the front (along +Y)

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

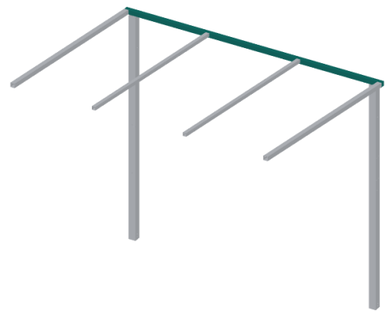

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two, 3,000 mm long, ends square; plastic end caps.
Positions from the left end, as seen from the street. Rivet nut holes are 11 mm; set an M8 steel rivet nut in each.
Underside: 32.5, 167.5, 2,832.5 and 2,967.5 (head cleats); 512.5 and 2,487.5 (knee braces); all on the centre line.
Inner face: 75 and 2,925 (end beam cleats), 1,015 and 1,985 (purlin cleats); 26 mm below the top on the front beam, 23.5 (end) and 18.5 (purlin) below the top on the rear beam.
Cable holes 12 mm with grommets: underside 125 and 2,875 (13 mm toward the canopy); inner face 2,975, 20 (front) or 16 (rear) below top.
Rear beam: top face 1,195 and 1,805 (L-feet), 1,920 (panel cable).
Front beam: underside 1,535 (PIR cable); two M5 rivet nuts at 1,485 and 1,515 (PIR bracket). Both: six M5 rivet nuts on the inner face for the line clips, at 300, 800, 1,300, 1,700, 2,200, 2,700.

COOLSHADE

github.com/BoujeeEnjinia1701/coolshade

CoolShade long beam (make 2: front and rear): making sketch

DRAWING NO.	REV	SHEET	SIZE
CSH-DWG-107	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-09-30	Amish Chadha

MATERIAL / NOTES

Galvanized steel SHS 50 x 50 x 2 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand