


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW

Scale 1:5; looking down (along -Z)

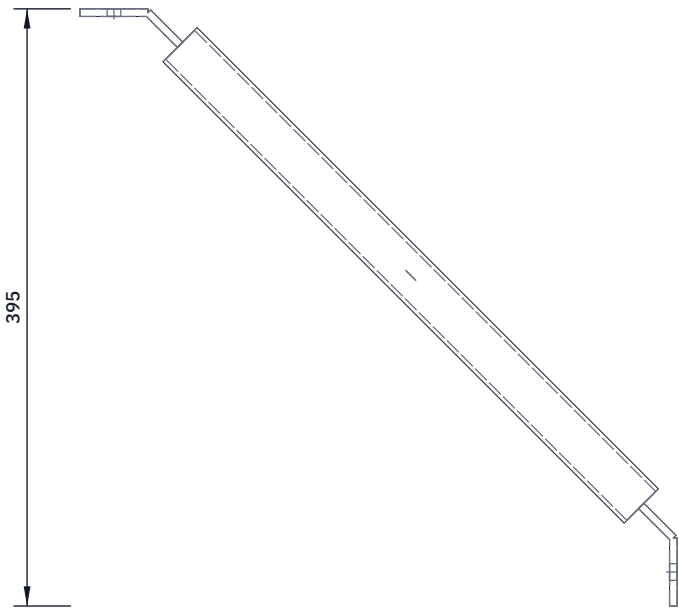


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

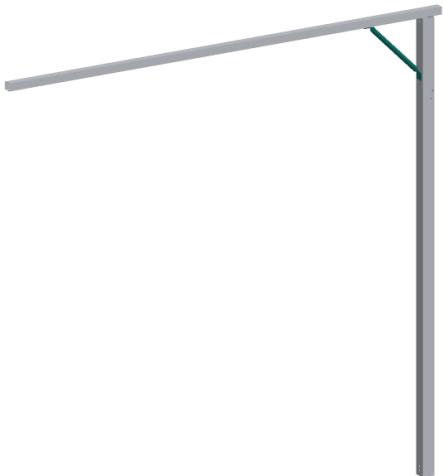

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make four. Cut 581 mm lengths of 32 mm tube.
Squash the last 75 mm of each end flat in a vice (about 50 mm wide, 5 mm thick), both ends flat in the same plane.
Bend each flat end 45 degrees, 45 mm from the end, the two ends bent opposite ways so they end up square to each other.
The bend points are 491 mm apart.
Lower end: one 11 mm hole, 22 mm from the end, on the centre line.
Upper end: one 9 mm hole, 22 mm from the end, on the centre line.
Zinc-rich paint where the galvanizing cracked in the vice.
Fit: lower end flat on the post's inner side face, its bend 350 mm below the beam (M10 through the post); upper end flat under the beam, its bend 350 mm in from the post (M8 into a rivet nut).
Check: lying on the post and beam, both flat ends sit flat.

COOLSHADE

github.com/BoujeeEnjinia1701/coolshade

CoolShade knee brace (make 4): making sketch

DRAWING NO. CSH-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Galvanized steel tube 32 mm OD x 2.5 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand