


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

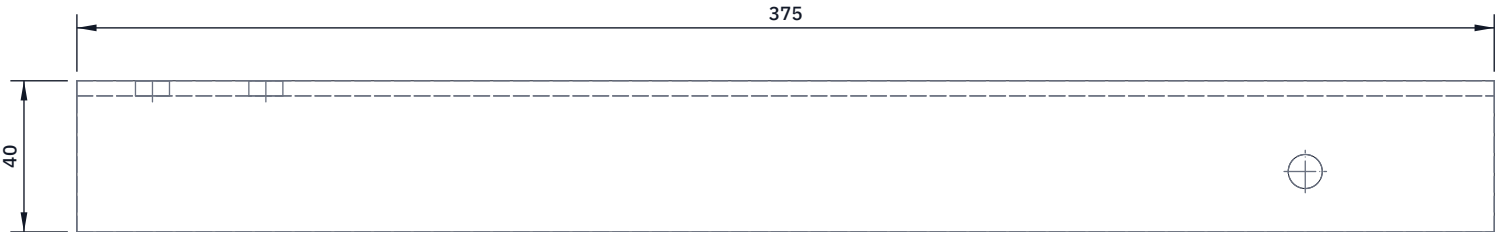

FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make one. Cut 375 mm of 40 x 40 x 4 angle; deburr.

Upright leg: two 9 mm holes 20 and 50 mm from the post end, 22 mm below the top face.

Flat leg: one 9 mm hole 325 mm from the post end, 24 mm out from the back of the upright leg (the shield's bolt).

Fit: upright leg flat on the street face of the front right post, flat leg on top pointing to the street, top 2,420 mm up, 75 mm of arm on the post face and 300 mm beyond its outer face. Two M8 bolts through the post; the shield hangs under the arm's end.

Check: the arm is level and the shield's lowest plate is 2,266 mm or more above the pavement.

COOLSHADE

github.com/BoujeeEnjinia1701/coolshade

CoolShade sensor arm: making sketch

DRAWING NO. CSH-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha	

MATERIAL / NOTES Galvanized equal angle 40 x 40 x 4 mm					
---	--	--	--	--	--