

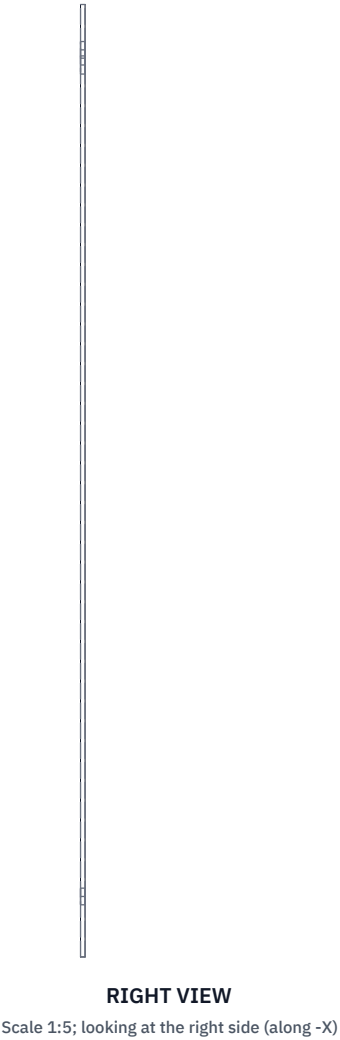
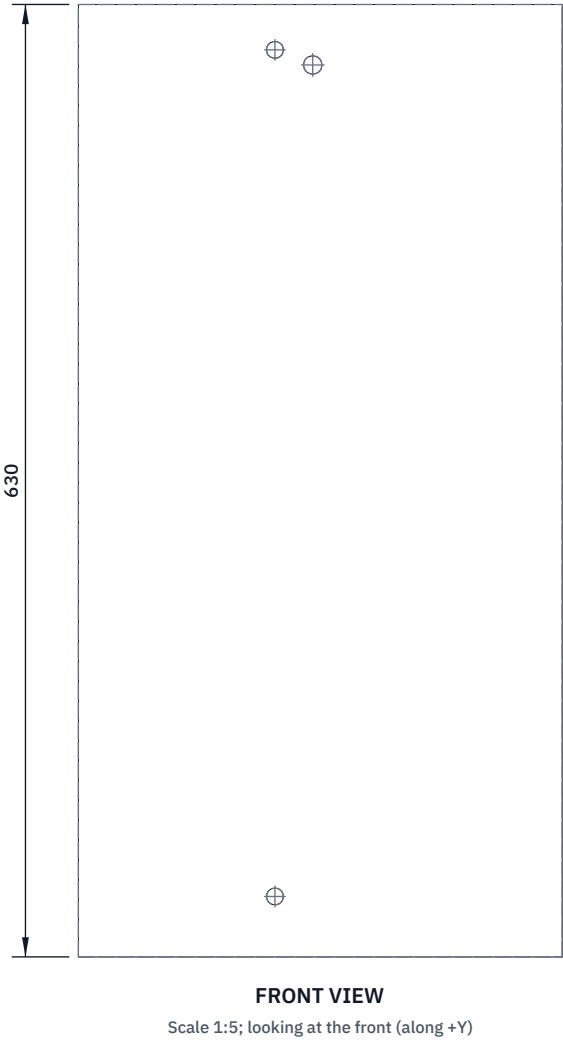


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

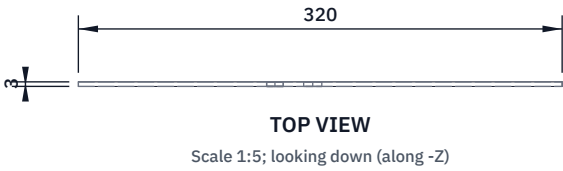

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make one, 320 x 630 mm from 3 mm sheet; round the corners.
Positions from the left edge (seen from inside the canopy) and from the bottom edge:
two 11 mm holes at 130, 40 up and 130, 600 up (bolts to post);
one 12 mm cable hole at 155, 590 up, with a grommet.
Mark and drill the pump's, filter bracket's and drain valve's holes from the parts: pump 90 to 290 across, 430 to 570 up;
filter centre 240 across, bracket 1,060 to 1,100 mm above the pavement;
valve 10 to 100 across, 250 to 320 up.
Fit: flat on the street face of the rear left post, bottom edge 750 mm up, 90 mm of plate beyond the post's outer face.
Check: plumb, and the drain valve is the lowest part of the line.

COOLSHADE				github.com/BoujeeEnjinia1701/coolshade			
CoolShade equipment plate: making sketch							
DRAWING NO. CSH-DWG-114			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5		UNITS mm	PROJECTION 		DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Galvanized steel sheet 3 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	