


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW
Scale 1:25; looking down (along -Z)

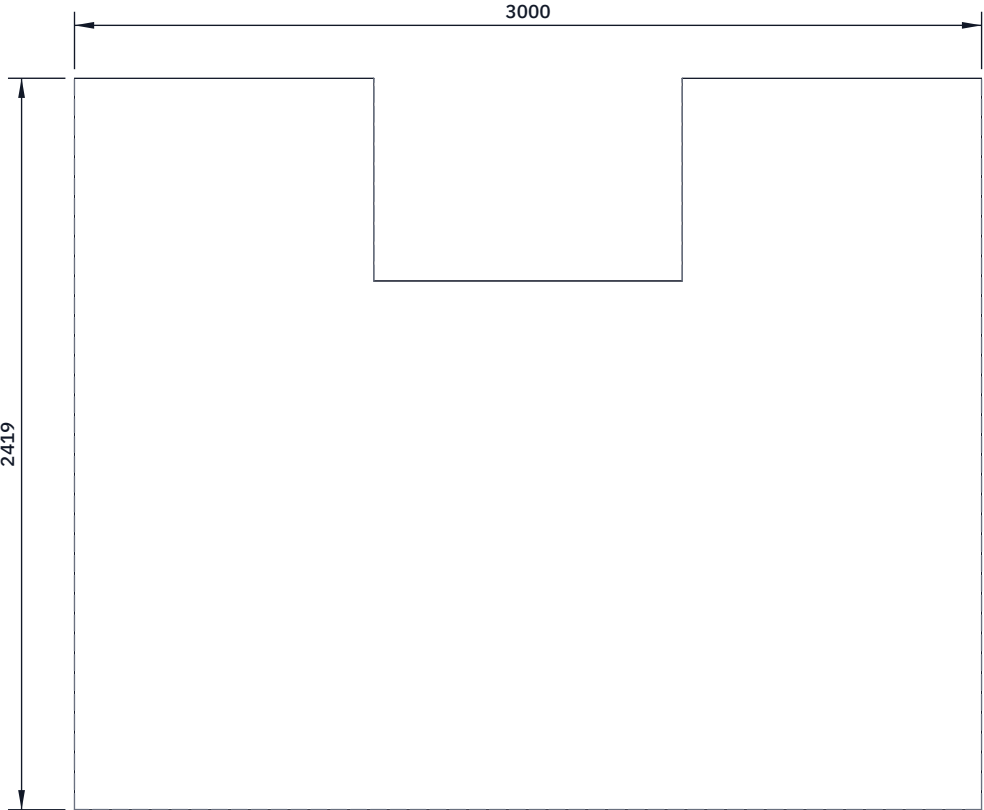

FRONT VIEW
Scale 1:25; looking at the front (along +Y)



RIGHT VIEW
Scale 1:25; looking at the right side (along -X)

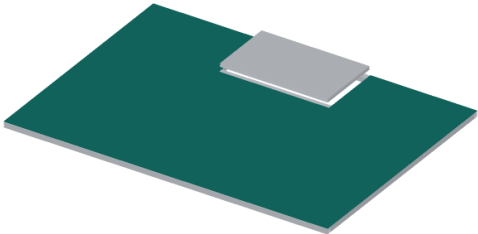

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Order made to size: 3,000 mm wide (along the curb) by 2,419 mm (down the slope), with a 1,020 x 670 mm notch at the middle of the rear edge for the solar panel.

Reinforced hem all round, including the notch; brass or stainless eyelets about every 300 mm and at every corner.

Fit: over the frame; lace each eyelet round the beam below it with cord. The notch's sides lace round the purlins, its front edge round the panel bearer; the panel covers the notch.

Fit only when forecast gusts are below 15 m/s; take it off before storms (15 minutes or less by unlacing).

Check: laid on the frame, the hem reaches every edge and the notch clears the L-feet and rails.

CoolShade shade fabric: outline for the maker, drawn laid flat

DRAWING NO. CSH-DWG-116			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:25	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Knitted HDPE shade cloth, about 90 % UV block					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	