
CONCEPT, NOT FOR FABRICATION

PRELIMINARY, NOT FOR FABRICATION


CrossSafe · github.com/BoujeeEnjinia1701/crosssafe

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	Sun shield, keyed saddles, anti-rotation bolt (DDR-002)	2026-09-25	AC
P3	Layout and labels tidied	2026-09-25	AC
P4	Constructable design: saddles, bands, plate, bracket (DDR-003)	2026-09-30	AC
P5	Bezels and visors on the LED heads; kit limited to 76 to 114.3 mm poles	2026-10-02	AC

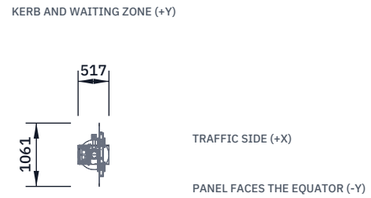

TOP VIEW

Scale 1:100; looking down (along -Z)

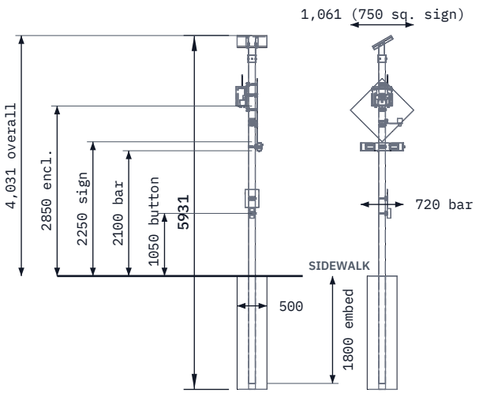


FRONT VIEW

Scale 1:100; looking at the front (along +Y)

RIGHT VIEW

Scale 1:100; looking at the right side (along -X)



ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Post 114.3 x 3.6 galvanized, 3700 above sidewalk, 1800 in a 500 footing
Existing-pole kit: 8 keyed saddles and bands, 76 to 114.3 mm poles
Sign 750 diamond, 2250 to 3311; faces traffic on +X
Light bar 720 x 70 x 130, bottom 2100; two 140 x 62 heads per face, each with bezel and 26 visor
Pilot light on the kerb end of the bar; button centre 1050
Radar and PIR on a 200 arm at 2600, toward the kerb
Enclosure IP65 150 x 260 x 300, bottom 2850, on a mounting plate
Ventilated sun shield, 25 air gap, roof and three walls, open bottom
Sign flat on two saddles; new post: M10 bolt through sign, saddle and post
Panel 20 W 500 x 360 on rails and a welded bracket, tilt 30 deg
Wind case 40 m/s gust: 45 % of S235 yield (CRS-CAL-001 v0.6)
Third-angle; front view from -Y; post on the Z axis

CROSSSAFE

github.com/BoujeeEnjinia1701/crosssafe

General arrangement, one beacon assembly

DRAWING NO.	REV	SHEET	SIZE
CRS-DWG-001	P5	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:100	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Galvanized steel post; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand