REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

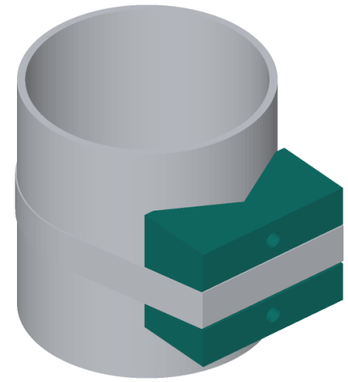

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Saw 60 mm slices off 80 x 40 mm bar: blocks 80 wide x 40 deep x 60 tall. The 80 x 60 face without the V is the front.

V: 120 degrees, centred, 70 mm wide at the back face, its point 20.2 mm in from the back. Saw inside the lines, file to them.

Key the V: hacksaw cuts 1 mm deep, 3 mm apart, running the full 60 mm height on both V faces. The ridges grip the pole.

Front: a groove 21 mm wide and 1 mm deep across the full width, centred on the height, for the band. Mill or file it flat.

Front: two M8 holes on the centre line, 20 mm above and below the middle: drill 6.8 mm 18 deep, tap 14 deep.

Fit: the pole sits in the V touching both faces (6 mm in from the back corners on 114 mm, 20 mm on 60 mm); the band runs round the pole and across the saddle's front in the groove.

Check: on a 114 mm tube the block must not rock.

CROSSSAFE github.com/BoujeeEnjinia1701/crosssafe

CrossSafe keyed pole saddle (make 8, all the same): making sketch

DRAWING NO.	REV	SHEET	SIZE
CRS-DWG-106	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Aluminium flat bar 80 x 40 mm, 6082 class

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand