REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

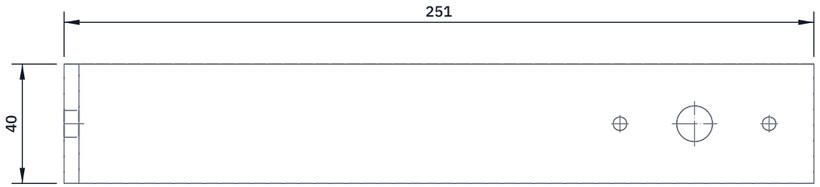

TOP VIEW

Scale 1:2; looking down (along -Z)

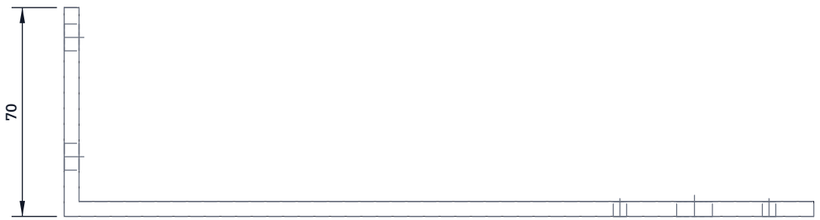

FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

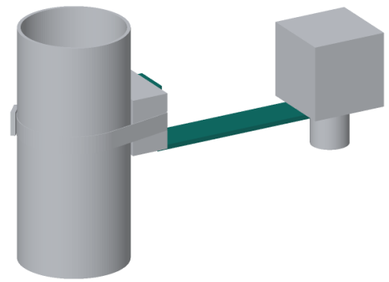

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 320 mm of 40 x 5 mm bar. Bend 90 degrees the easy way (across the 5 mm) in a vice with a radius block, to an L: long leg 251 mm and short leg 70 mm, outside sizes. The short leg stands up.

Short leg: two 9 mm holes on the centre line, 20 and 60 mm up from the long leg's underside.

Long leg, measured from its far end: a 12 mm hole for the PIR's neck on the centre line 40 mm in; two 4.5 mm holes for the radar's screws, 15 and 65 mm in.

Fit: the short leg bolts flat on its saddle with two M8 bolts; the long leg points at the kerb, the radar sits on top of its far end and the PIR hangs underneath.

Check: the legs are square and the long leg is level when fitted.

CROSSSAFE github.com/BoujeeEnjinia1701/crosssafe

CrossSafe radar arm: making sketch

DRAWING NO.	REV	SHEET	SIZE
CRS-DWG-107	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Aluminium flat bar 40 x 5 mm, 6082 class

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand