
CONCEPT, NOT FOR FABRICATION


CrossSafe · github.com/BoujeeEnjinia1701/crosssafe

REV	DESCRIPTION	DATE	BY
P3	Concept sheet	2026-10-31	AC



TOP VIEW

Scale 1:50; looking down (along -Z)

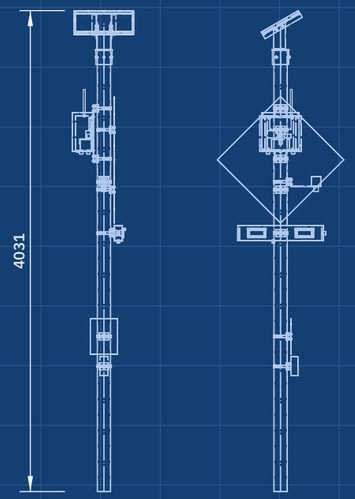


FRONT VIEW

Scale 1:50; looking at the front (along +Y)

RIGHT VIEW

Scale 1:50; looking at the right side (along -X)

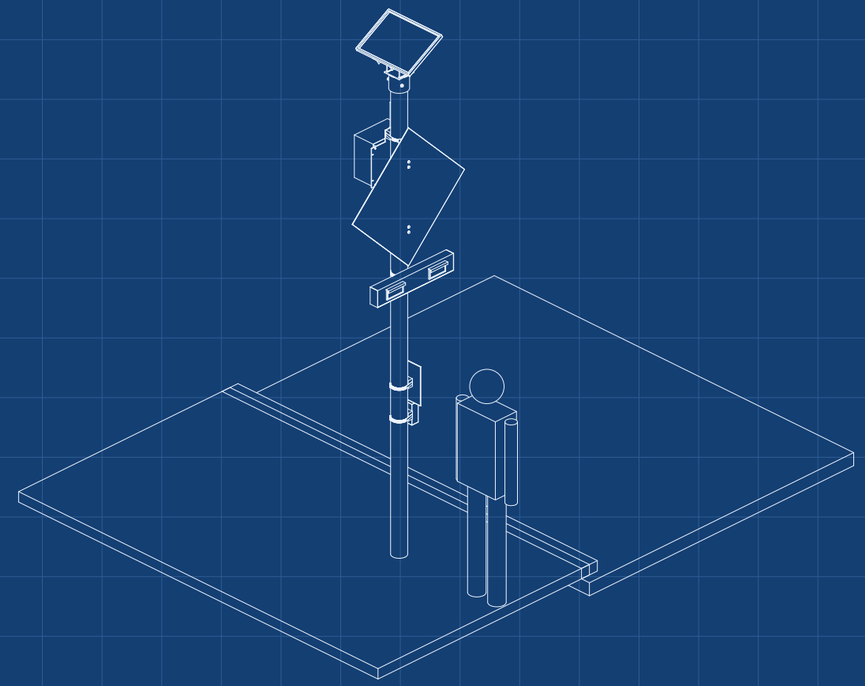

ISOMETRIC VIEW

Not to scale; figure is a 1.75 m person; seen from the front right and above, about 30 deg elevation

KEY FIGURES

One assembly per side of a 7 m two-lane crossing (two per crossing)
Two amber heads per face, 140 x 62 mm lens, IA-21 wig-wag flash
Button plus PIR-gated radar; LoRa link syncs both sides
20 W panel, 12.8 V 12 Ah LiFePO4; 16.0 Wh/day at 300 uses (CRS-CAL-001 v0.7)
7.7 days without sun; sun shield keeps the box at 53.9 C at 50 C ambient
117 modelled parts, 27.6 kg; $364 per side on an existing pole

CROSSSAFE

github.com/BoujeeEnjinia1701/crosssafe

Solar crossing beacon concept

DRAWING NO.	REV	SHEET	SIZE
CRS-DWG-010	P3	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:50	mm		2026-10-31	Amish Chadha

MATERIAL / NOTES

Massing model for concept communication

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand