


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

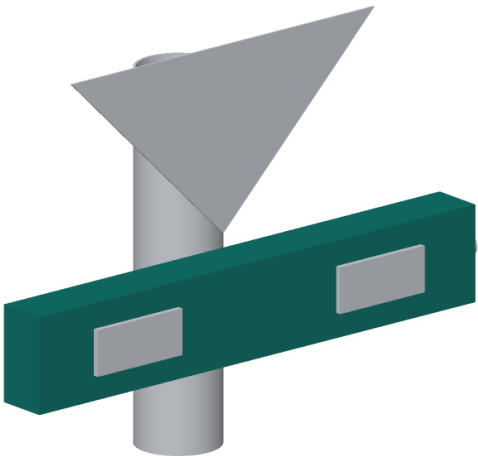

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Three parts: a folded channel, a bottom cover and two end caps.

Channel: blank 716 x 346 mm (check the developed length with a test bend). Fold a 10 mm lip, the 128 mm back wall, the 70 mm top, the 128 mm front wall and a 10 mm lip; both lips point inward.

Head cut-outs: four, 128 x 50 mm, two in each wall, centred 200 mm each side of the middle and 65 mm up from the underside.

Back wall: two 9 mm holes on the middle, 45 and 85 mm up.

Cover: 70 x 716 mm, a 16 mm gland hole 60 mm from the middle on the road-side half; M4 screws into rivet nuts in the lips.

End caps: 70 x 130 mm with 15 mm flanges folded in on three sides; rivet into the channel ends. Kerb-end cap: 22 mm pilot light hole.

Fit: the back wall bolts flat to its saddle; the cover comes off for the two bolts. Check: square, cover seats on both lips.

CROSSSAFE				github.com/BoujeeEnjinia1701/crosssafe			
CrossSafe light bar housing: making sketch							
DRAWING NO. CRS-DWG-101			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:10		UNITS mm	PROJECTION 		DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 2 mm, 5052 class							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	