


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

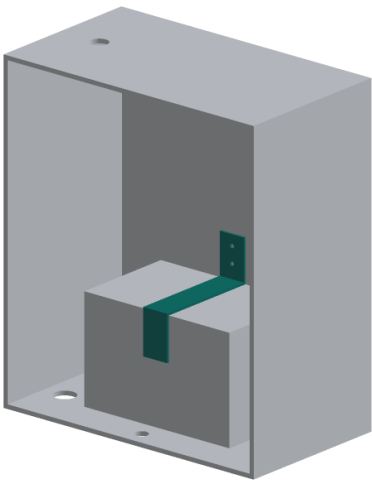

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 180 mm of 25 x 2 mm strip; round the corners.
Bend to a Z, inside bend radius about 2 mm: a 40 mm leg that stands on the internal plate, a 97 mm top that lies on the battery and a 40 mm leg that comes down the battery's front.
Two 4 mm holes on the centre of the plate leg, 15 and 30 mm above the top's underside.
Fit: tap two M4 holes in the internal plate to match, on its centre line 113 and 128 mm above the enclosure's inside floor.
The top lies on the battery and the front leg stops it sliding out; the battery stands on the floor against the plate.
Check: the battery cannot move with the strap screwed down.

CROSSSAFE

github.com/BoujeeEnjinia1701/crosssafe

CrossSafe battery strap: making sketch

DRAWING NO. CRS-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium strip 25 x 2 mm, 5052 or 6061 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	