




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

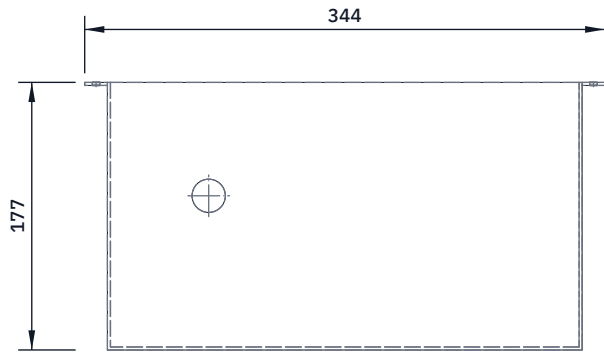


TOP VIEW
Scale 1:5; looking down (along -Z)

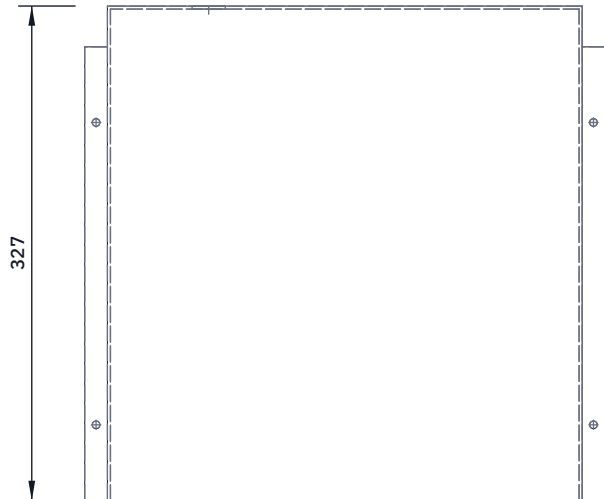

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

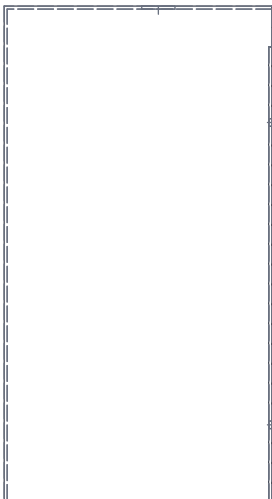

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

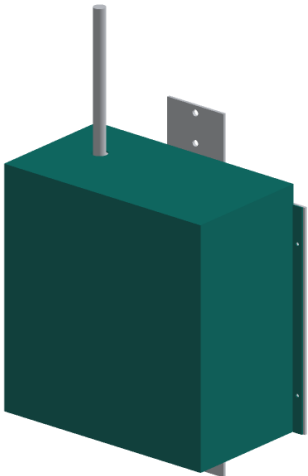

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One blank, folded: a back 314 x 327 mm in the middle, a side 177 mm deep on each long edge, a roof 177 mm deep on the top edge, and a 15 mm flange on the free edge of each side (300 mm long, starting at the bottom), with corner tabs on the roof.

Cut with snips; drill 3 mm relief holes where bend lines cross.

Fold the sides and roof 90 degrees forward, the tabs down over the sides (rivet, two 3.2 mm rivets each), the flanges 90 degrees out.

Flanges: two 5.5 mm holes each, 7.5 mm from the fold, 50 and 250 mm up from the bottom edge.

Roof: a 22 mm hole 75 mm back from its front edge, 90 mm toward the kerb side, for the antenna.

Fit: flanges flat on the mounting plate; four M5 security screws.

25 mm air gap at the back, sides and roof; open at the bottom.

Check: the gap is 25 mm, plus or minus 3, all round.

CROSSSAFE				github.com/BoujeeEnjinia1701/crosssafe			
CrossSafe sun shield: making sketch							
DRAWING NO. CRS-DWG-109			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5		UNITS mm	PROJECTION 		DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES White powder-coated aluminium sheet 2 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	