


Wire Specifications:
16AWG 1.36 mm² Spec44
22AWG 0.32mm² Spec44

LV Battery


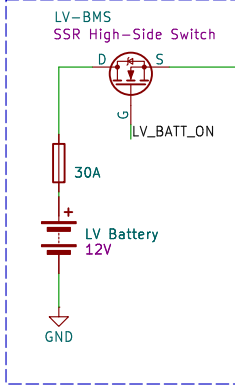


Fuse rated at 750mA to provide strict overcurrent protection for the interlocks while safely accommodating the 392mA nominal SDC current.


Emergency Buttons



BSPD

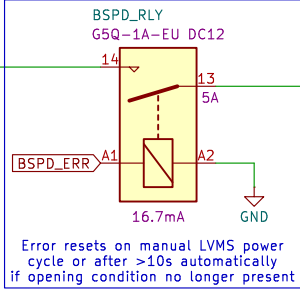


Emergency Button




Accumulator

TRACTIVE RELAY CONTROLLER PCB

- Controls precharge sequence and closing of AIRs
- Prevents re-closing of AIRs if SDC closes without power cycle
- Sends TS READY to and awaits TS ON signal from VCU
- Powers AIR Coils directly from SDC

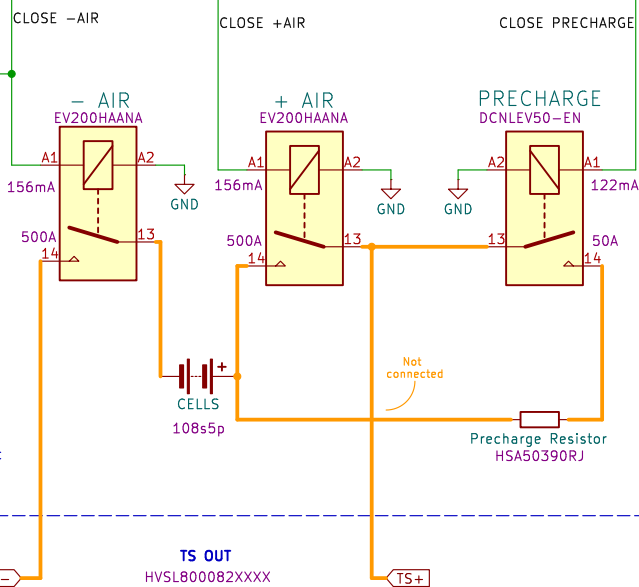

AIRS:
- 1.7W @ 12V DC
hold power
- 156mA coil current
Total 312mA

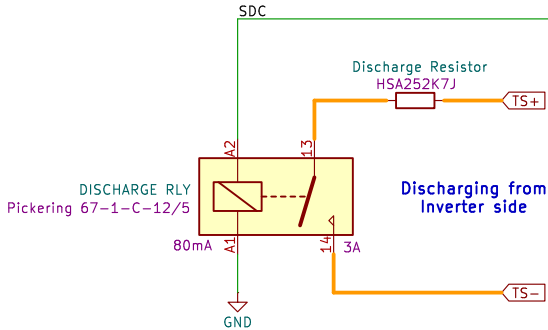

Discharging from Inverter side

Total SDC Consumption = AIR Coil Current + Discharge Coil current
= 312mA + 80mA
= 392mA

All components in SDC rated to handle current

Orion BMS 2


AMS

Bender IR155-3203

IMD

AMS/IMD Latching PCB

(PCB integrated with TSAL Logic)

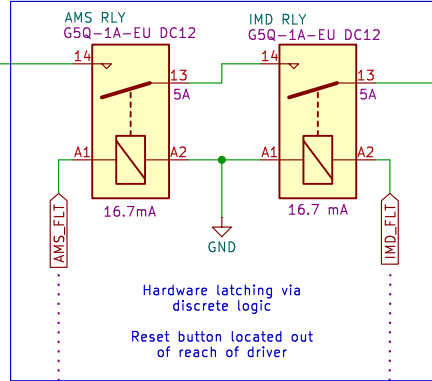

Hardware latching via discrete logic
Reset button located out of reach of driver

Vehicle: STAG 12
Drawn By: Adam Eastman
Checked By: John McGarvey, Ray Wang
CAD Part: N/A

SUFST

Sheet: Shutdown Loop
File: shutdown_loop.kicad_sch

Title: Shutdown Circuit

Size: A3 Date: 2026-03-23
KiCad E.D.A. 9.0.4

Rev: v1.0.0
Id: 5/11

