
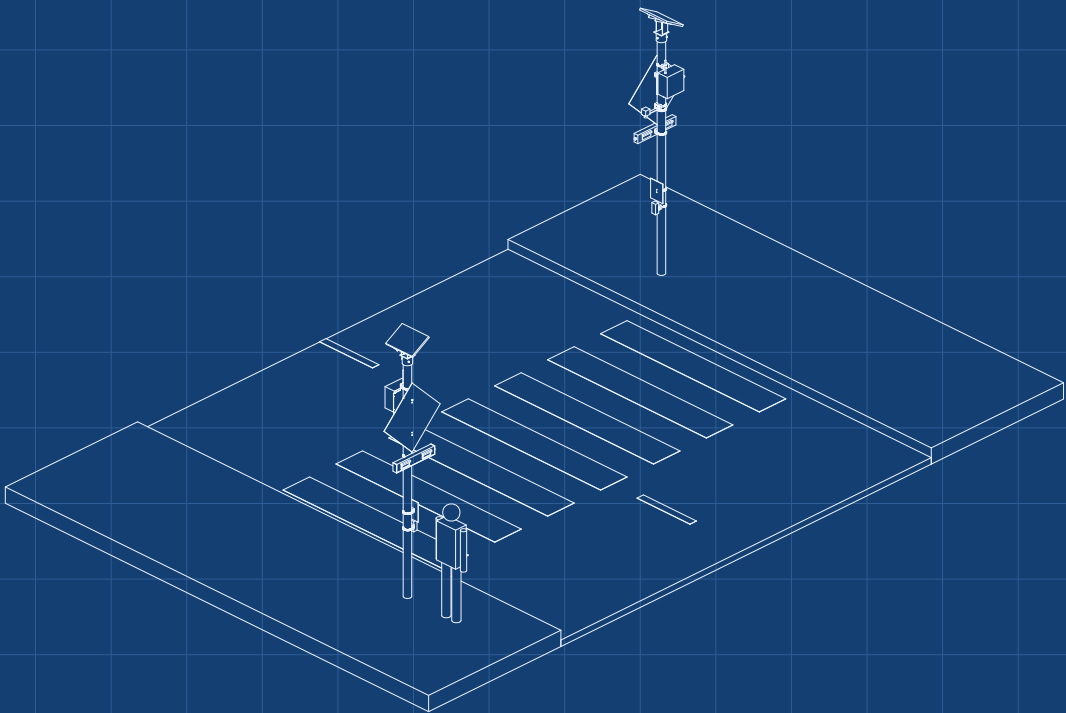
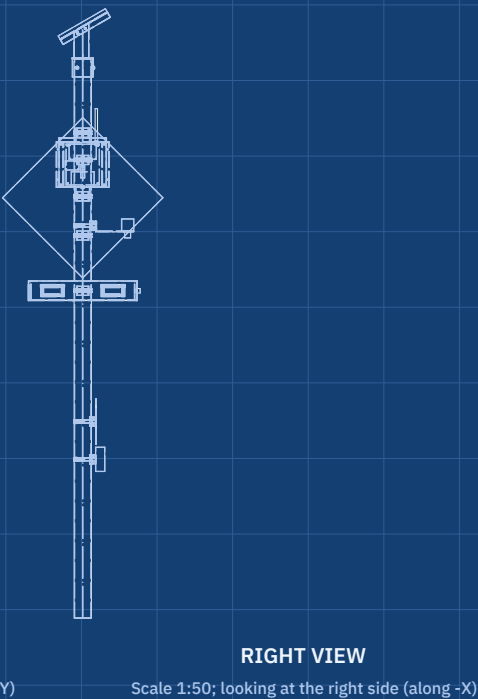
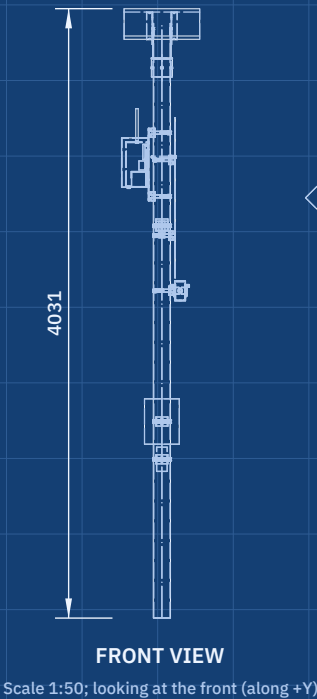


CONCEPT, NOT FOR FABRICATION

CrossSafe · github.com/BoujeeEnjinia1701/crosssafe

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-10-02	AC



ISOMETRIC VIEW
Not to scale; figure is a 1.75 m person; seen from the front right and above, about 30 deg elevation

KEY FIGURES

- One assembly per side of a 7 m two-lane crossing (two per crossing)
- Two amber heads per face, 140 x 62 mm lens, IA-21 wig-wag flash
- Button plus PIR-gated radar; LoRa link syncs both sides
- 20 W panel, 12.8 V 12 Ah LiFePO4; 16.0 Wh/day at 300 uses (CRS-CAL-001)
- 7.7 days without sun; sun shield keeps the battery below 60 C
- \$364 per side on an existing pole (CRS-CAL-001)

CROSSSAFE		github.com/BoujeeEnjinia1701/crosssafe		
Solar crossing beacon concept				
DRAWING NO. CRS-DWG-010		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:50	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	