

CONCEPT, NOT FOR FABRICATION


| REV | DESCRIPTION   | DATE       | BY |
|-----|---------------|------------|----|
| P1  | Concept sheet | 2026-09-25 | AC |




TOP VIEW  
Scale 1:50



FRONT VIEW  
Scale 1:50

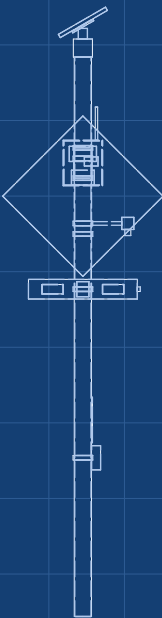

RIGHT VIEW  
Scale 1:50

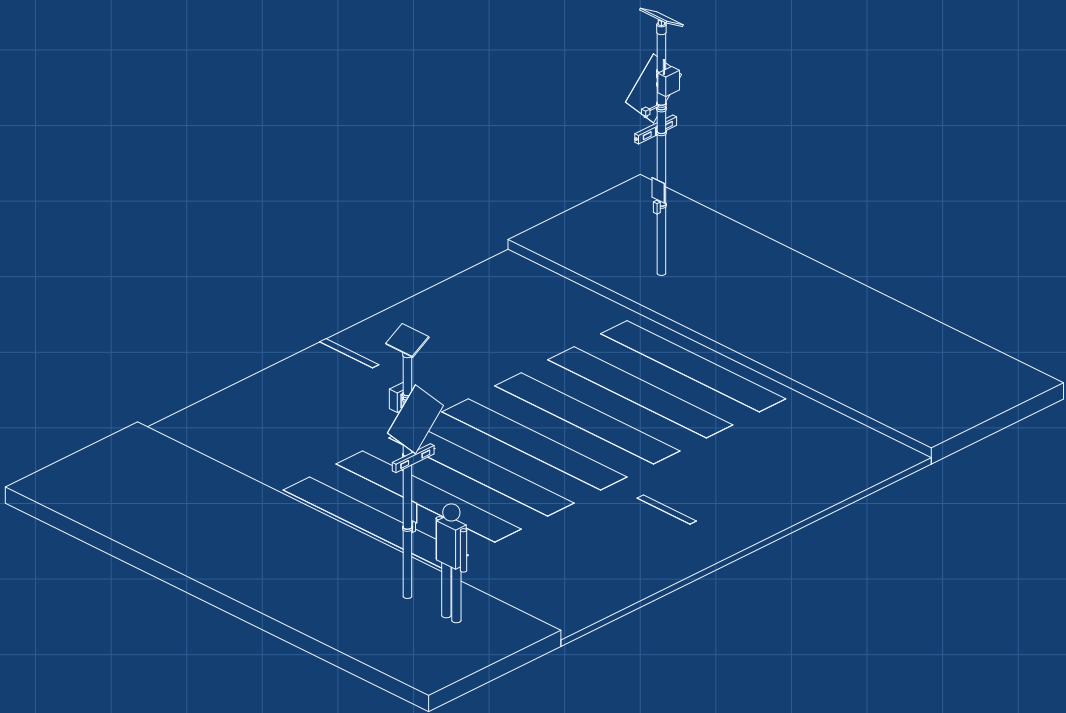

ISOMETRIC VIEW  
Not to scale; figure is a 1.75 m person

KEY FIGURES

One assembly per side of a 7 m two-lane crossing (two per crossing)  
Two amber heads per face, 140 x 62 mm lens, IA-21 wig-wag flash  
Button plus PIR-gated radar; LoRa link syncs both sides  
20 W panel, 12.8 V 12 Ah LiFePO4; 16.0 Wh/day at 300 uses (CRS-CAL-001)  
7.7 days without sun; \$318 per side on an existing pole

CROSSSAFE

Solar crossing beacon concept

|                            |             |                                                                                                     |                    |                       |
|----------------------------|-------------|-----------------------------------------------------------------------------------------------------|--------------------|-----------------------|
| DRAWING NO.<br>CRS-DWG-010 |             | REV<br>P1                                                                                           | SHEET<br>1 of 1    | SIZE<br>ANSI B        |
| SCALE<br>1:50              | UNITS<br>mm | PROJECTION<br> | DATE<br>2026-09-25 | DRAWN<br>Amish Chadha |

MATERIAL / NOTES  
Massing model for concept communication