


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

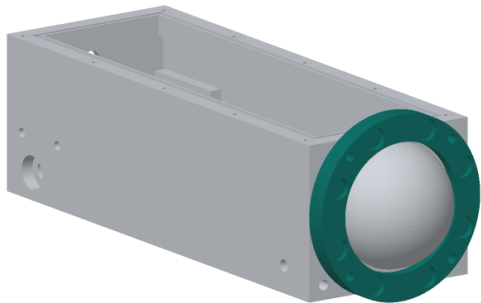

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn a ring 88 mm outside, 62 mm bore, 10 mm thick.
Back face: recess 73 mm across, 5 mm deep, for the dome flange.
Front face: eight pockets 10.5 mm across, 3 deep, on a 75 mm circle, starting 22.5 degrees from the top, every 45 degrees.
None sits at the bottom, where the fin passes.
Four 4.5 mm holes on an 80 mm circle at 45, 135, 225, 315 degrees.
From each pocket drill 2 mm through to a 2 x 2 mm wire groove on the back face, and run it out at the crawler's lower right, by the lead hole.
Fit: back face flat on the front wall, recess over the dome flange;
four M4 x 16 screws. LEDs bonded in the pockets, wired in series, then the pockets and groove potted with clear epoxy.
Check: the dome flange is gripped evenly; the dome does not turn.

CULVERTCRAWL

github.com/BoujeeEnjinia1701/culvertcrawl

CulvertCrawl front bezel: making sketch

DRAWING NO. CVC-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES 6061-T6 aluminium bar 90 mm diameter					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand