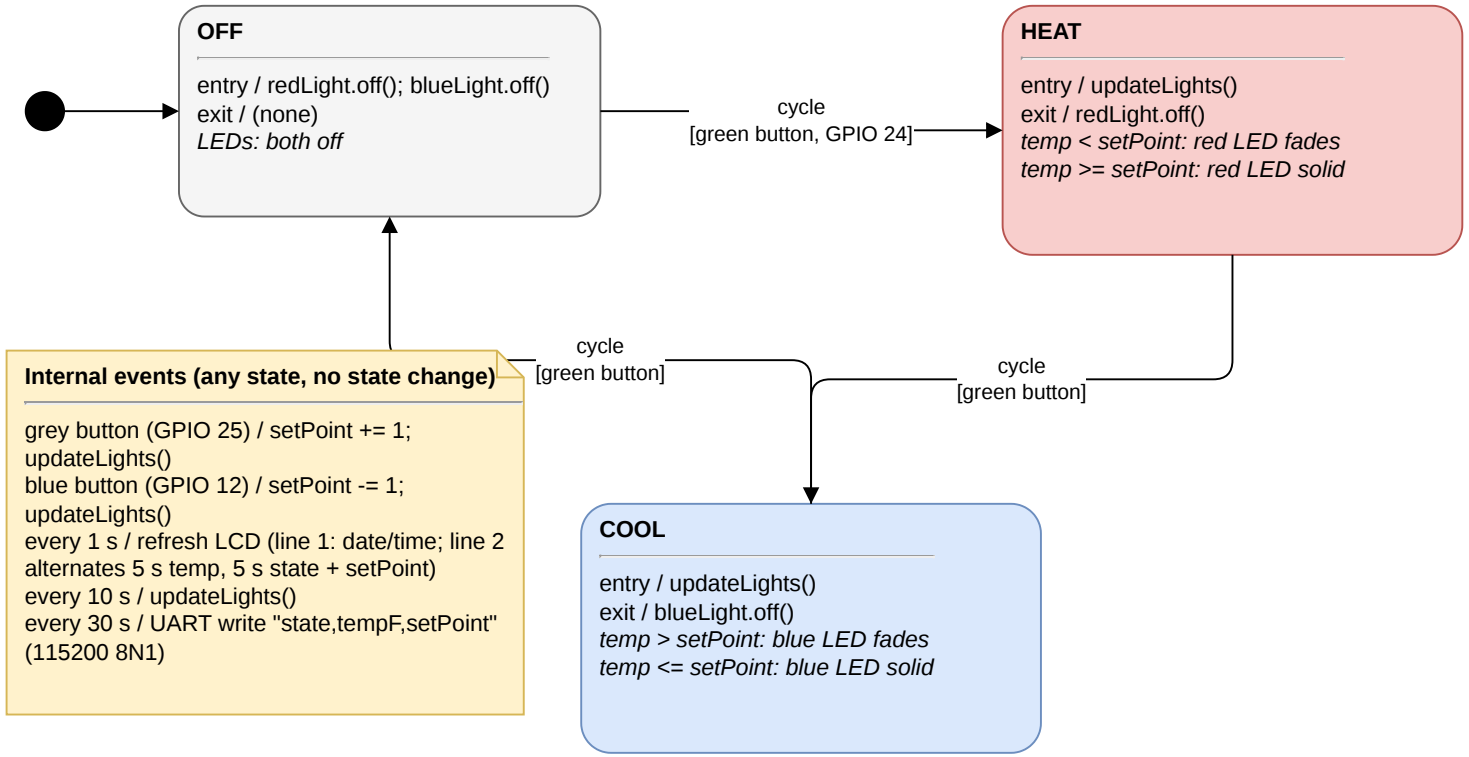
OFF
entry / redLight.off(); blueLight.off()
exit / (none)
LEDs: both off
cycle
[green button, GPIO 24]
HEAT
entry / updateLights()
exit / redLight.off()
temp < setPoint: red LED fades
temp >= setPoint: red LED solid
cycle
[green button]
cycle
[green button]
Internal events (any state, no state change)
grey button (GPIO 25) / setPoint += 1;
updateLights()
blue button (GPIO 12) / setPoint -= 1;
updateLights()
every 1 s / refresh LCD (line 1: date/time; line 2
alternates 5 s temp, 5 s state + setPoint)
every 10 s / updateLights()
every 30 s / UART write "state,tempF,setPoint"
(115200 8N1)
COOL
entry / updateLights()
exit / blueLight.off()
temp > setPoint: blue LED fades
temp <= setPoint: blue LED solid