




CONCEPT, NOT FOR FABRICATION

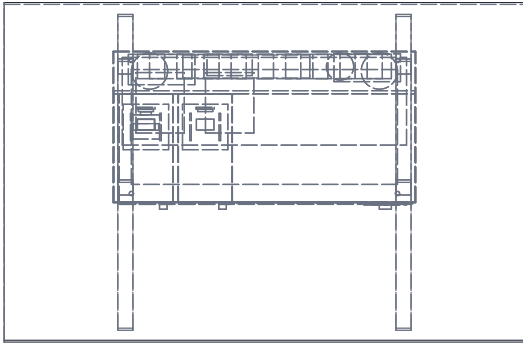


TOP VIEW
Scale 1:25

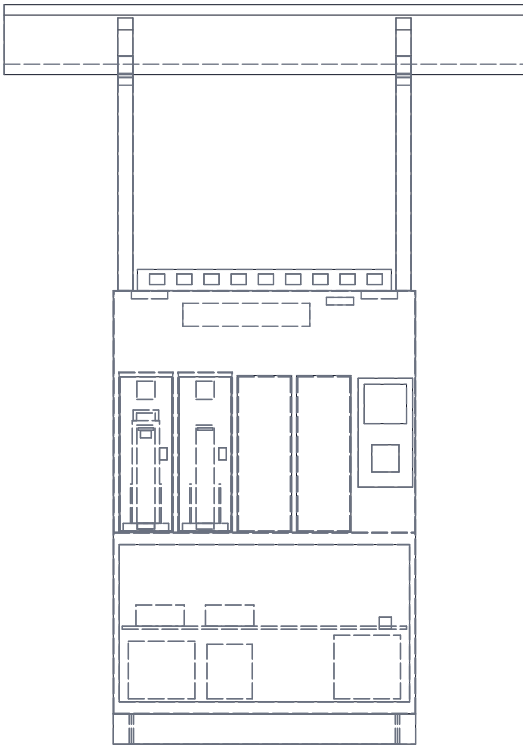

FRONT VIEW
Scale 1:25

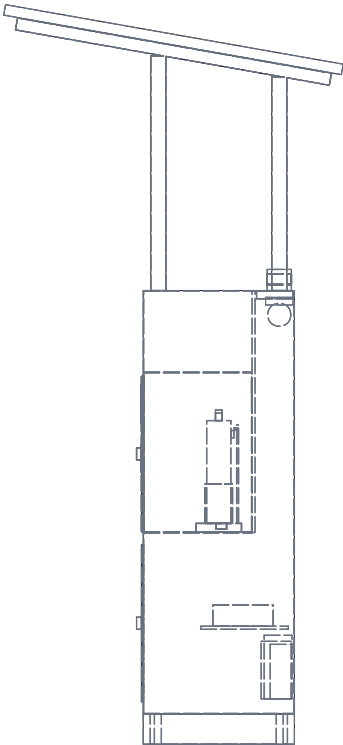

RIGHT VIEW
Scale 1:25

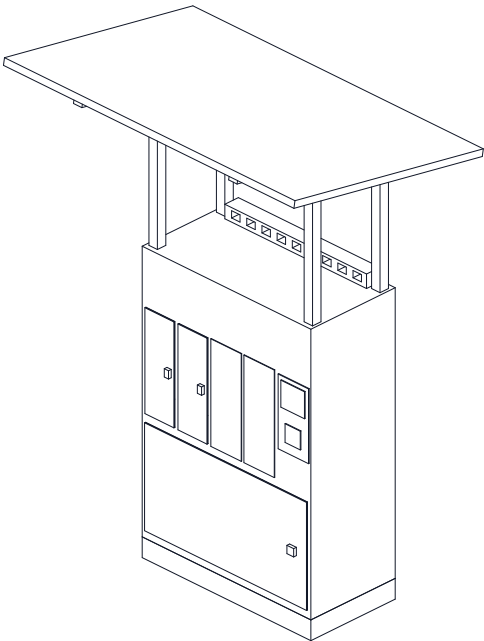

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

Cabinet 1000 x 500 x 1500 on a flush plinth
Canopy: 400 W panel at 10 deg; top 2446, lowest 2179
4 bays at 196 pitch, openings 172 x 510
bays 1 and 2 fitted; 3 and 4 blank plates
Pack: SwapCell v0.3, 340 x 90 x 80, 393 overall,
connector down on cradle at 730; handle top 1105
Receptacle: 10 kOhm INTERLOCK coding resistor;
class D catch; one CAN channel per bay
Operable parts 730 to 1105 above the sidewalk
Grid: one 120 V 15 A or 230 V 10 A circuit, RCBO
Anchors: 4 x M12 to a concrete pad (not supplied),
3.8 kN design tension each (DKH-CAL-001)
Mass about 205 kg without packs (est.)
PRELIMINARY, NOT FOR FABRICATION

DOCKHUB

General arrangement, first prototype (2 of 4 bays)

DRAWING NO. DKH-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:25	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES 1.5 mm galvanized steel, powder coat. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand