


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW
Scale 1:20; looking down (along -Z)

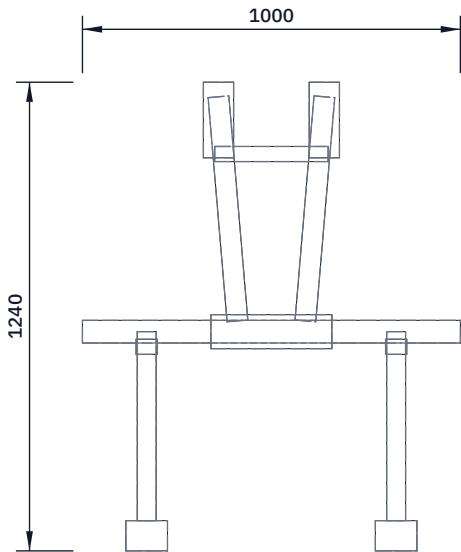

FRONT VIEW
Scale 1:20; looking at the front (along +Y)



RIGHT VIEW
Scale 1:20; looking at the right side (along -X)

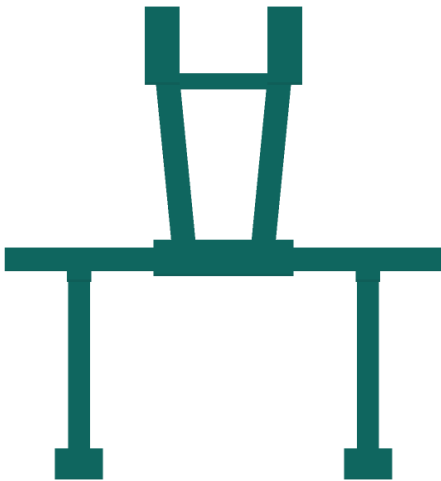

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Hip belt 1,000 long, 25 foam pad 320 x 90 at the back.
Two shoulder straps 600 long with 80 x 200 pads, crossed by a 300 chest strap.
Two slings, 500 long, from the belt sides at 660 apart, each with a cam buckle to set the length.
Each sling ends in a pole loop 110 across, box-and-cross stitched, sewn with UV thread.
Set: pole loops at the bearer's knuckle height.

Bearer harness (2), laid flat

DRAWING NO. DLT-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 50 mm polyester webbing, 25 mm foam, cam buckles					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	