


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 2:1; looking down (along -Z)

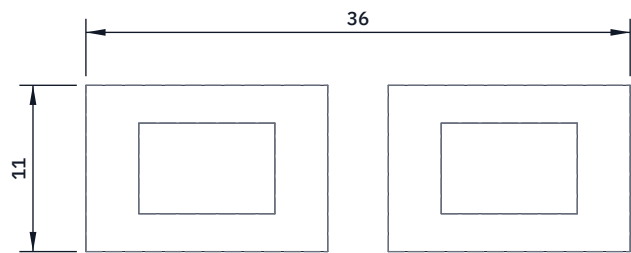


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

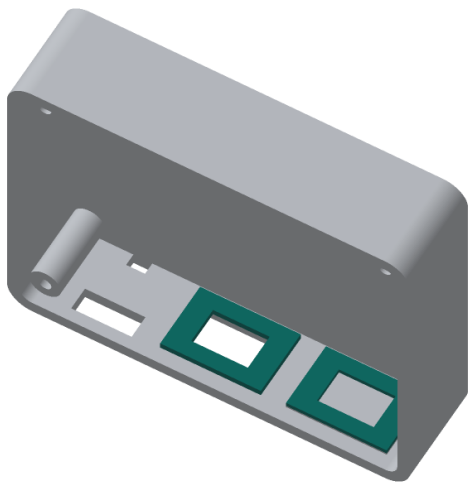

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Two flat seals, each 16 x 11 mm with a 9 x 6 mm opening in the middle that matches the sensor's inlet and outlet.

Inlet seal (left, sits on the screen): 0.7 mm thick.

Outlet seal (right, sits on the floor): 1.0 mm thick.

Print flat, slowly. Mark the inlet seal so they cannot be swapped.

Fit: centre each over its slot on the inner floor, 18 mm apart centre to centre; a spot of adhesive holds it while assembling.

The sensor rests on both seals, so they seal its ports to the slots and the fan draws only outside air.

Check: the sensor sits level on both seals.

DUSTBADGE

github.com/BoujeeEnjinia1701/dustbadge

DustBadge sensor port seals (make 2): making sketch

DRAWING NO. DBG-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES TPU 95A, 3D printed, 100 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand